



Air Oil Separator for Subaru WRX/STI Front Mounted Intercooler Setups

2018-02-26

Thank you for purchasing this PERRIN product for your car! Installation of this product should only be performed by persons experienced with installation of aftermarket performance parts and proper operation of high performance vehicles. If vehicle needs to be raised off the ground for installation, the installer must use proper jacks, jack-stands and/or a professional vehicle hoist for safety of the installer and to protect property. If the vehicle is lifted improperly, serious injury or death may occur! Please read through all instructions before performing any portion of installation. Always use appropriate personal protection equipment such as gloves, eye and hearing protection for installation of this product. If you have any questions, please contact our tech department prior to starting installation. We can be reached in any of the following methods:

Email Tech@PERRINperformance.com

Instant Chat off the main page of www.PERRINperformance.com

Or simply call our tech team at 503-693-1702



WARNING: This product can expose you to chemicals including Lead which is known to the State of California to cause cancer birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov

GENERAL MODIFICATION NOTE

Modifications to any vehicle can change the handling and performance. As with any vehicle extreme care must be used to prevent loss of control or roll-over during sharp turns or abrupt maneuvers. Always wear seat belts, and drive safely, recognizing that reduced speeds and specialized driving techniques may be required. Failure to drive a vehicle safely may result in serious injury or death. Do not drive a vehicle unless you are familiar with its unique handling characteristics and are confident of your ability to maintain control under all driving conditions. Some modifications (and combinations of modifications) are not recommended and may not be permitted in your state or country. Consult the owner's manual, service manual, instructions accompanying these products, and local laws before purchasing and installing these modifications. You are responsible for the legality and safety of the vehicle you modify using these components.

SPECIAL NOTES:

- Installation of this part should be performed by a qualified technician as this is a complicated and time-consuming installation with many different steps and optional hook ups along the way.
- Read through entire installation before starting this project. There is a decent amount of planning needed for hose routing, and it is important to understand the full installation before beginning installation of the AOS.
- We have provided a couple of methods on how to hook this up to your engine. Keep in mind there are many variations of how this can be installed. Consult your tuner or qualified technician before installing this part on your car to better determine how it should be setup on your vehicle.
- The PERRIN Air Oil Separator (AOS) was designed to remove a significant amount of the oil and water vapor that normally gets sent to your intake system to be ingested by your engine. There are many variables as to how much oil will make it past our AOS, but expect it to remove a significant amount of the crank case blow by. For cars with built engines with excessive blow-by, you may still experience oil getting past our Air Oil Separator.
- To clean out your Air Oil Separator, remove M6 bolt with nylon washer, remove bottom and red foam filter. Use a degreaser like Simple Green and warm water to clean out. Let air dry until no water is left inside it. Alternatively, you can put entire part into an oven at the lowest temp setting (200F) for an hour to dry out part.


NPT Notes:

- There are many NPT (National Pipe Thread) fittings included with your Air Oil Separator. Throughout the instructions, these notes below will be referred to, and it's important to understand these types of fittings and how they work.
- NPT fittings are a tapered thread that seals when tightened, not bottomed out. Thread fittings in by hand and tighten roughly 1/2 to 1 full turn more until fitting is tight.
NOTE: Using a small amount of Teflon tape on threads is a good idea to ensure a proper seal. Teflon tape is rated to work up to 500F and is impervious to all chemicals that your AOS will see. This is highly recommended to use over any other sealant.
- Angle of 90 degree fittings can be adjusted after tightening, as long as they are not backed off more than 1/4 of a turn.

Included Parts with PERRIN Air Oil Separator for Top Mount Intercoolers:

- (1) PERRIN Universal Air Oil Separator (AOS)
- (1) O-rings
- (1) 08-13 TMIC AOS Bracket
- (1) Crank Case Vent Adapter
- (9') 1/2" Crank Case Vent Hose
- (3') 3/8" Fuel Injection Hose
- (5') 5/16" Coolant Hose
- (4') 5/16" Fuel Injection Hose
- (9) #3 Hose Clamps
- (4) #2 Hose Clamps
- (2) #27mm Hose Clamp
- (1) 1/2" Vacuum Cap
- (2) 3/8 NPT 1/2" Straight Fitting
- (2) 3/8 NPT 1/2" 90 Degree Fitting
- (1) 1/4 NPT 3/8" Barb Straight Brass Fitting
- (1) 3/8 NPT- 1/2" Barb Female Brass Fitting

- (2) 1/4 NPT 1/2" Barb Straight Fitting
- (2) 1/8 NPT 5/16" 90 Degree Barb Fitting
- (1) 1/8NPT 5/16" 90 Degree Barb Fitting
- (2) 1/8 NPT 5/16" Straight Barb Fitting
- (2) 1/2" Y Plastic Connector
- (1) 1/2" Tee Plastic Connector
- (2) 1/2"-1/2" Plastic Connector
- (1) 5/16"-5/16" Plastic Connector
- (1) 5/8-1/2" Plastic Connector
- (3) 3/8 NPT Plug
- (2) 1/4 NPT Plug
- (1) M10x80mm Hex Bolt
- (1) M10 Nut
- (8) 3/8" Washers
- (3) M8x16mm Button Head Cap Screw
- (3) M8 SS Washers
- (2) M6x14mm Button Head Cap Screw
- (2) M6 SS Washer
- (1) M4 Hex Wrench
- (1) M5 Hex Wrench
- (1) M6 Hex Wrench
- (20) Zip Ties

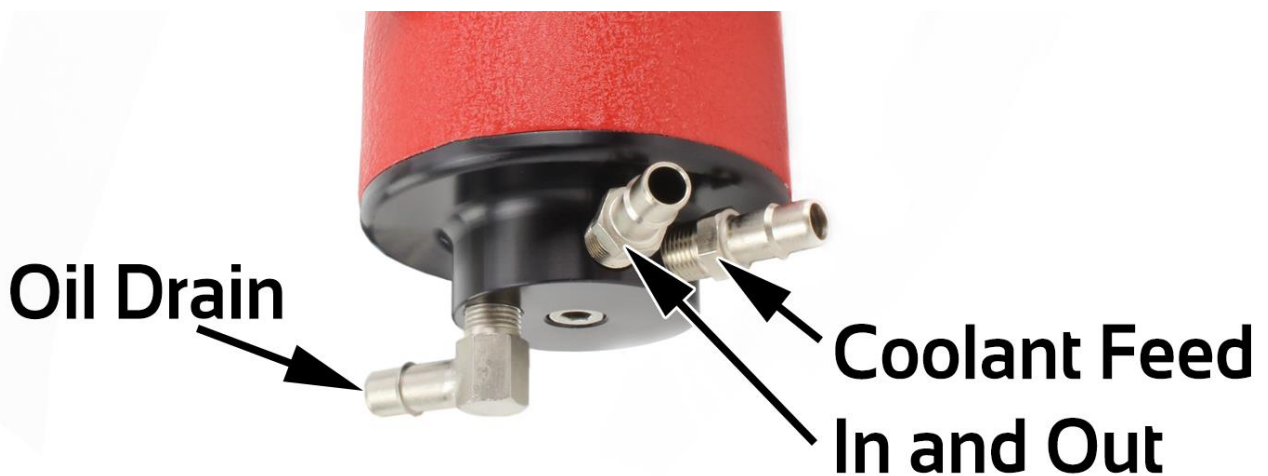


Installation Instructions

1. Using the above diagram as a guide, take note of all fittings and our recommended connections. There are many options and many ways to install this. Please read through all instructions before proceeding with install.
2. Locate and remove intercooler (including Y-pipe and throttle body coupler) from engine or any boost tubes connected to turbo and throttle body. This is necessary to gain access to center crank case vent, PCV system and other items.

3. Assembly and Orientation

- a. Each AOS is pre-assembled with M6 bolt, nylon seal, O-ring and foam filter inside for packaging purposes. To ensure your AOS has an oil tight seal, ensure that bolt is hand tightened before finishing steps below. Failure to tighten M6 bolt will lead to vacuum leaks and oil leaking out bottom of can.
- b. Orientate bottom to desired position (based on steps below) and hand tighten bolt until bottom is mostly flush with AOS body. This may need to be done a couple times throughout the installation. **NOTE: A slight mismatch can occur if bottom is pushed to one side or to the other. Make sure bottom is centered over body while tightening, or an oil leak can occur.**

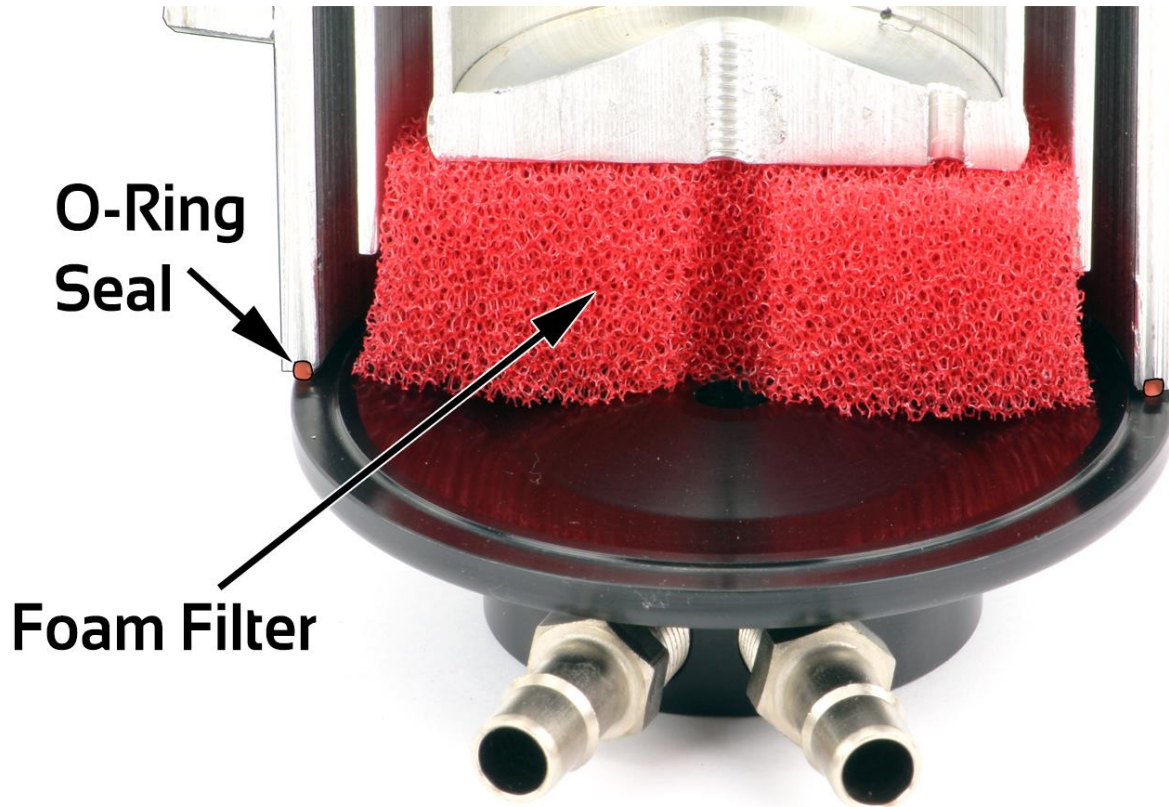


Cutaway Showing Internals of AOS

- c. If bottom is removed, or bolt is loosened too far, the o-ring may become dislodged. Ensure that o-ring is all the way around groove in bottom of AOS body before tightening bolt into bottom of AOS. **NOTE: Some powder coating will be in the groove and this is ok as the o-ring will seal once tightened.**

4. Air Oil Separator Mounting

- a. The placement of the AOS needs to meet two main criteria. First, the oil drain port needs to be higher than the engine port used for draining oil back into the engine. As long as this is mounted higher, AOS will drain properly. Secondly, AOS needs to be mounted vertically like in above picture. It will not function properly if mounted on its side or at an angle.
- b. The supplied bracket allows AOS to fit on a car with front mounted Intercoolers installed. This puts the AOS in the proper location for it to clear most boost tubes and other commonly installed parts. Before proceeding past Step 4, test fit AOS in this location to ensure it clears boost tubes and any other components that might be installed.
- c. Replace M10 bolt securing rear pitch stop mount to chassis with supplied longer M10 bolt. Tighten to roughly 42ft-lbs. **NOTE: Threads will be sticking out past nut on chassis, this will be used to mount the supplied AOS bracket.**

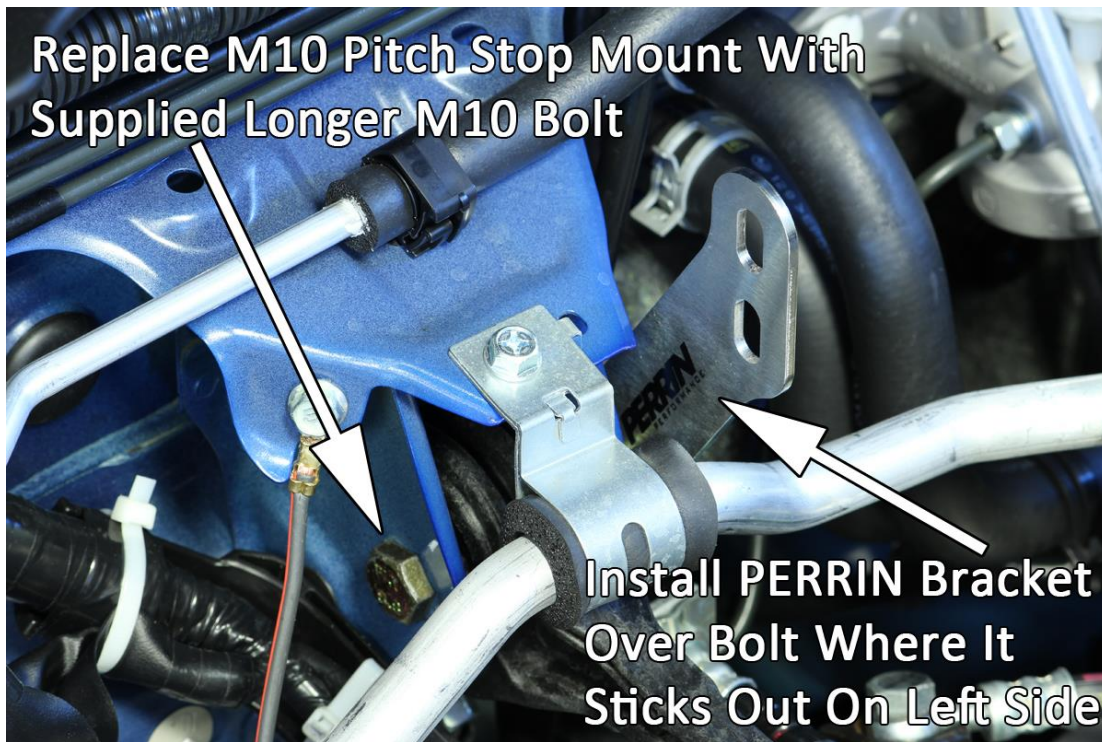

- d. Install (1) included 3/8" washer over end of M10 bolt, Install bracket followed by (1) 3/8" washer, then supplied M10 Nut. Tighten nut to roughly 40ft-lbs. **NOTE:** Included are extra 3/8" washers to allow bracket to clear chassis on different models. You may need to use more washers on certain models, or to clear other aftermarket parts, this is normal.




- e. Using supplied M8 button head bolts and SS washers, install AOS to bracket and snug bolts down temporarily.
- f. Take note of AOS clearing all OEM hoses, lines and other things in engine bay. If rotation or adjustments need to be made, remove AOS from bracket and adjust. **NOTE: Some models will have clearance issues with A/C line. Simply push out of way and carefully bend to add clearance.**
- g. Over the next few steps it may be necessary to remove AOS from bracket to adjust orientation of bottom and fittings to better match your specific setup. It is not necessary to fully tighten to bracket until final step.



Above shows completed installation of AOS on a car with a PERRIN FMIC installed.

5. Coolant Feed Connections

- a. The coolant connection is an optional hookup, but we **HIGHLY** recommend connecting these up as they help reduce water vapor and sludge that can build up in AOS. The easiest connection to get coolant from is the throttle body, as all Subaru models have the same coolant connections on the throttle body that can be used. Other connection points can be used as long as there is some coolant flow through the hoses. **NOTE: Installing coolant connection will cause some coolant loss and coolant spill. Make sure to top off coolant after installation is complete.**

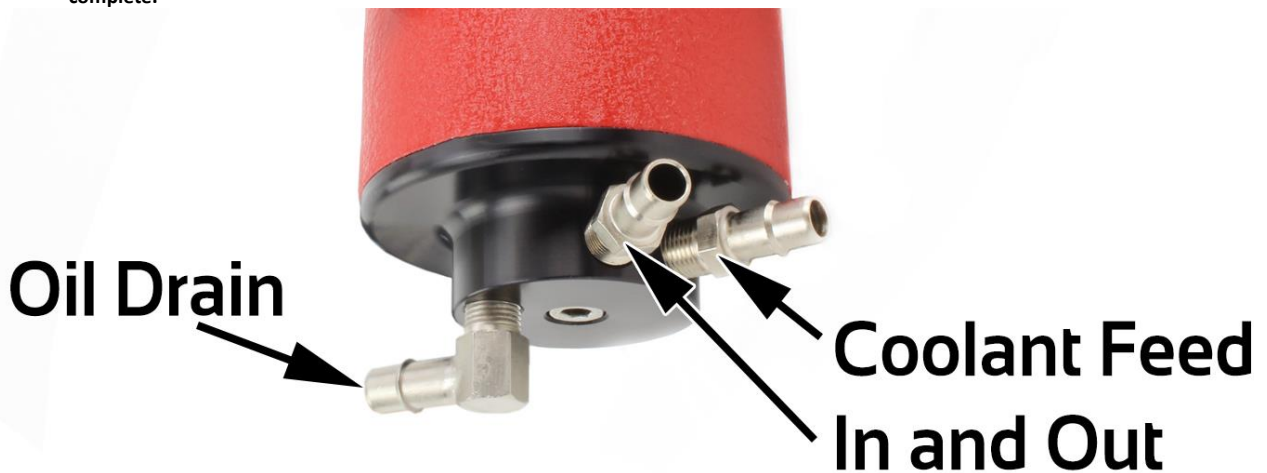


- b. Install supplied 5/16" fittings into coolant ports on the side of AOS bottom as shown above. This fitting is NPT, which is a tapered, thread that seals when tightened, not bottomed out. Thread fittings in by hand and tighten roughly 1/2 to 1 full turn more until fitting is tight. **NOTE: Using a small amount of Teflon tape on threads is a good idea to ensure a proper seal.**



Picture above shows 04+STI throttle body. 02-05 WRX throttle body will appear slightly different.

- c. Locate coolant hose on throttle body (shown above) that will be used to supply coolant to AOS bottom.
- d. Disconnect coolant hose from throttle body and install supplied 5/16"-5/16" plastic adapter into hose. Secure with OEM pinch clamp.
- e. Install supplied 5/16" coolant hose to 5/16" plastic adapter and route hose to either coolant feed fitting on AOS bottom. Cut hose to length, install onto fitting and secure both ends using supplied #2 hose clamp. **NOTE: During this step it is important to orient AOS bottom so coolant feed hoses, have the cleanest path to engine. Expect to orient bottom at least one more time before installation is complete.**

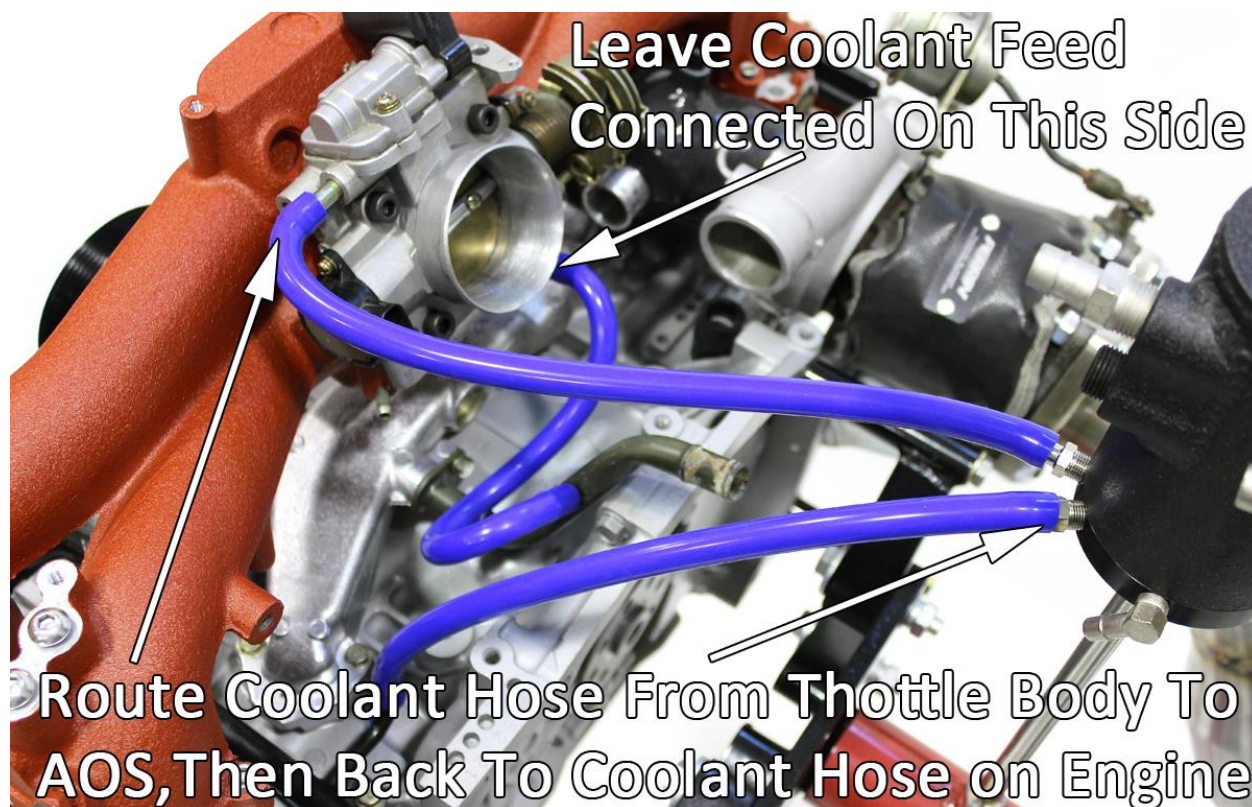

Actual routing of hoses may not be represented above. Diagram shows simplified path to help visualize routing.




2008+ WRX coolant hose routing shown above. Diagram shows simplified path to help visualize routing.

- f. Install remaining 5/16" coolant hose to 5/16" fitting on AOS bottom and secure with supplied #2 clamp. Route hose back to fitting left open on throttle body and secure with supplied #2 hose clamp. **NOTE: Orient AOS bottom again, to ensure the cleanest path to engine. Expect to orient bottom at least one more time before installation is complete.**
- g. Using above diagram, you can visualize the coolant hose connections for all cars. This diagram has been simplified to show the hose routing. Hoses can be routed differently depending on where the AOS is mounted or if intercooler plumbing requires this. Keep in mind that the coolant fittings on the AOS become part of the coolant path from engine to throttle body.

6. Oil Drain and Crank Case Vent Connection


The AOS oil drain is **NOT** an optional hook-up as the AOS is not designed to contain oil within itself. This fitting is used to drain the oil that is captured within the AOS body back to the engine through a crank case vent.

- a. There are three different sets of instructions below depending on which vehicle you have (08+STI, 08-10 WRX, and 11-14 WRX).

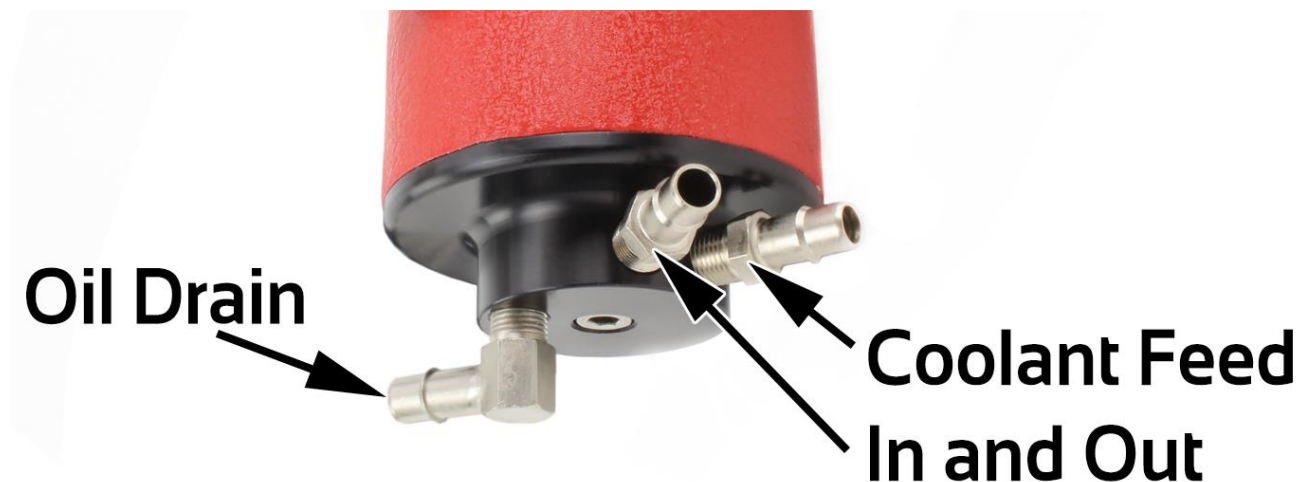


- b. Install supplied 5/16" 90 degree fitting into oil drain outlet (shown in diagram above) in bottom of AOS keeping in mind that this needs to point in the direction the drain hose will be routed. **See NPT Notes above regarding installation of this fitting.**
- c. Using diagrams below, locate OEM PCV/crank case vent junction and remove from engine, turbo inlet hose, and intake manifold. This step will vary depending on car this is being installed on. The same basic steps need to be taken, with removal of junction from car, then capping connection at turbo inlet hose.
 - i. **When removing Junction from the 02-03 WRX**, you will find nothing but a simple plastic junction. Remove junction and hoses from engine taking note as to where the one hose goes to PCV valve under throttle body as this will need to be connected to in later steps. See diagram below which shows throttle body removed to make picture clearer. Continue to step "e".
 - ii. **When removing PCV Junction from the 04-07 WRX and 04+ STI**, there is a PCV diagnosis connector (electrical connection) where

hose meets the turbo inlet hose. Remove hose from PCV diagnosis connector, leaving nipple open and electrical connection connected to turbo inlet hose, as well as crank case vent on block fitting open. See diagram below which shows throttle body removed to make picture clearer. Continue to step "e".

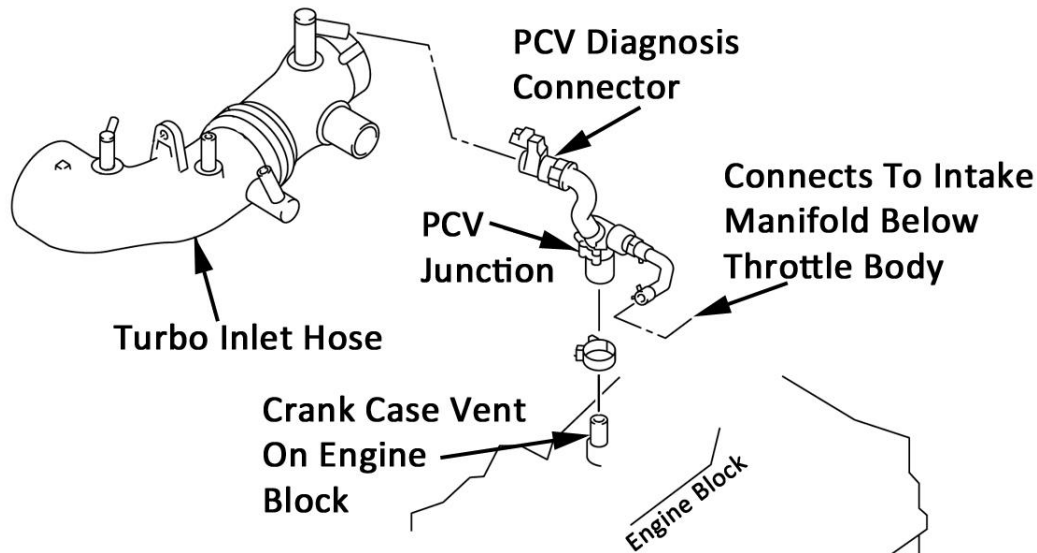

Picture above shows typical 2008+ STI PCV Junction and Inlet Hose

Remove Rubber Hose Leaving Diagnosis Connector In Place

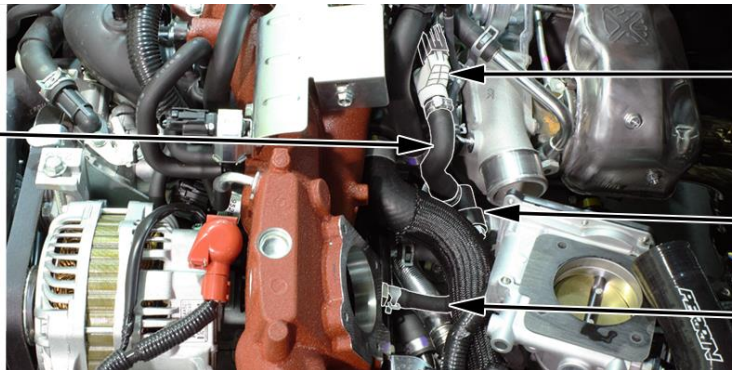


PCV Diagnosis Connector

PCV Junction On Engine Block

PCV Hose

Above picture shows 2008 STI with PCV junction exposed.

- iii. When removing PCV Junction on 2008-10 WRX models, there is a PCV diagnosis connector where the PCV junction meets a hose going to turbo inlet hose (See diagram below). Disconnect PCV diagnosis connector from PCV junction, disconnect electrical plug from PCV junction and remove junction with hoses going to intake manifold and turbo inlet hose. This will leave nipple on turbo inlet hose open as well as crank case vent on block.

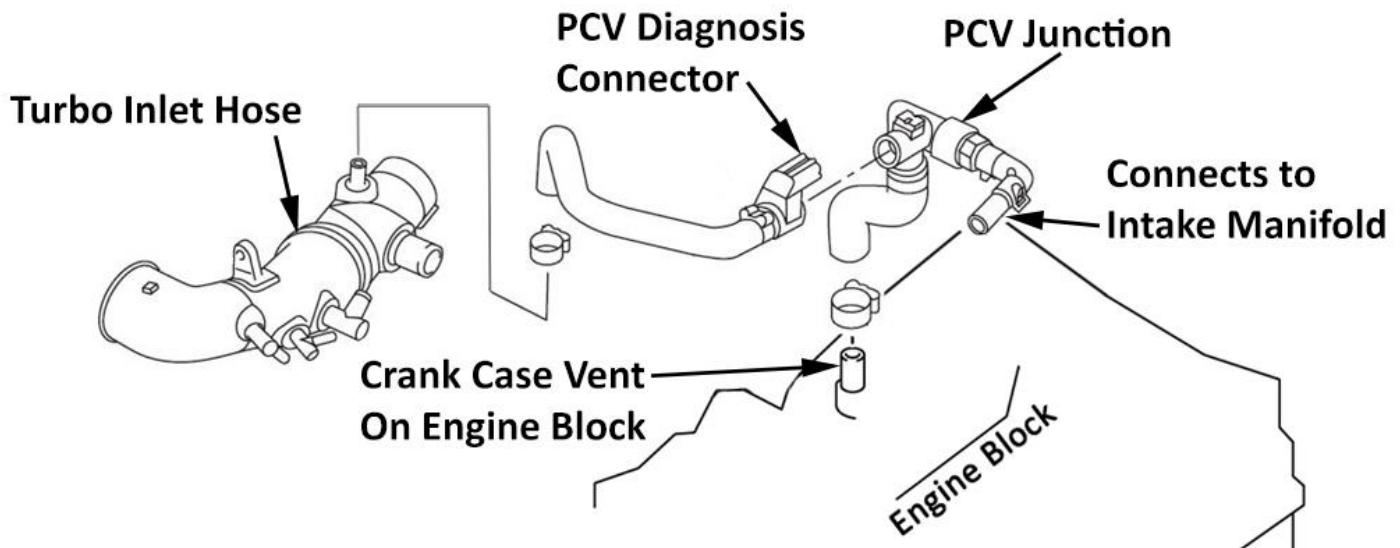

Above diagram shows 2008-10 WRX PCV junction.

- iv. Using pictures below locate pin inside of PCV diagnosis connector and remove using needle nose pliers. Install pin into female pins on PCV diagnosis harness. Use electrical tape to secure fitting and protect against it grounding out on components. This step will bypass this sensor so there is no check engine light. Continue to step "e".



Above diagrams show pin being removed from PCV diagnosis connector and the connector with female pins to reinstall it to.

- v. **When removing PCV Junction on 2011-14 WRX models**, there is a PCV diagnosis connector where the PCV junction meets a hose going to turbo inlet hose (See diagrams below). Remove PVC diagnosis connector from the PCV junction (leaving electrical connection alone). Remove junction with hose going to intake manifold. This will leave nipple on PCV diagnosis connector as well as crank case vent on block. Alternatively, you can remove PCV diagnosis connector and follow instructions for 2008-10 WRX models. This makes for a cleaner installation but also requires bypassing the PCV diagnosis connector.

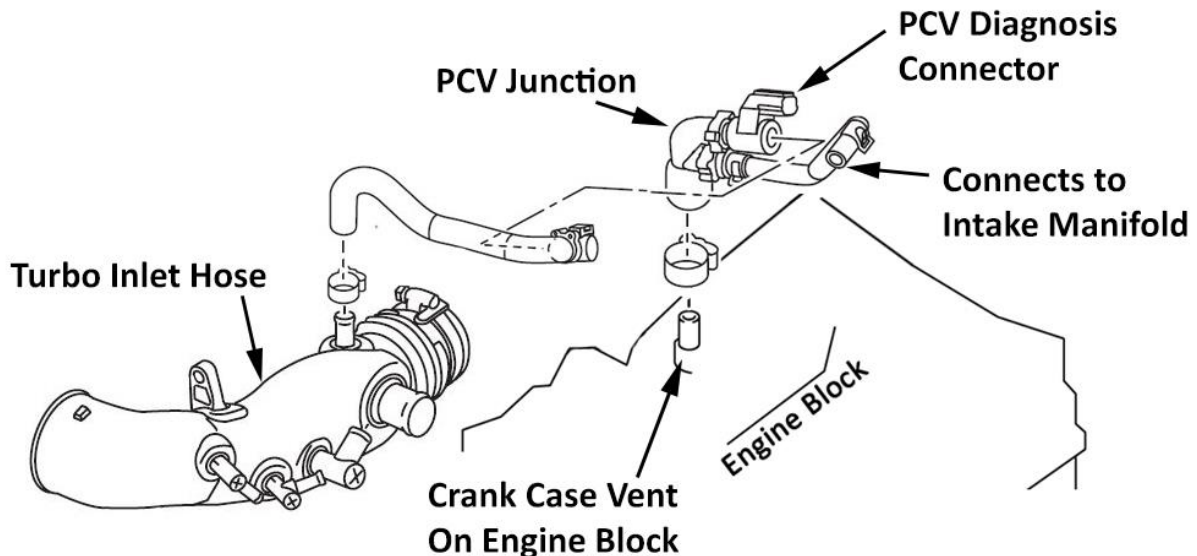


Diagram above shows 2011-14 WRX crank case vent and PCV junction setup.


2011+ WRX PCV Junction



Picture above shows 2011-14 WRX PCV Junction with PCV diagnosis connector removed from upper hose.

- d. With PCV junction removed from engine, using supplied 1/2" vacuum cap, plug open connection at turbo inlet hose. This step will vary from car to car. Use diagrams above to help with location of fitting to cap. **NOTE: It is important to ensure there are no vacuum leaks in turbo inlet hose after this step is complete. This will cause a lean condition and lead to engine damage.**
 - i. 2002-3 WRX models will need to cap open port on turbo inlet hose.
 - ii. 2004-07 WRX and 2004+ STI will cap open port on PCV diagnosis connector on turbo inlet hose.
 - iii. 2008-10 will cap open fitting on turbo inlet hose.
 - iv. 2011-14 WRX will cap open fitting on PCV diagnosis connector.

- e. Check OEM crank case vent junction to see if short rubber hose (3/4" ID x 2" long) was pulled off crank case vent in above step. If so, remove from OEM PCV junction and reinstall to engine block as this is used to connect PERRIN crank case vent adapter to engine block. 2010-2014 WRX's can ignore this step and use supplied 3/4" hose on crank case vent.
- f. With short rubber hose on block, remove pinch clamps and loosely install supplied 27mm clamps.
- g. Using diagram below as a guide, install supplied 5/16" 90 degree fitting into PERRIN crank case vent adapter, making sure to aim in the direction shown below or in a direction that allows oil to travel downhill from AOS bottom. This step can vary slightly depending on which car it is being installed on, and on the aftermarket parts installed. **See NPT Notes above regarding installation of this fitting.**

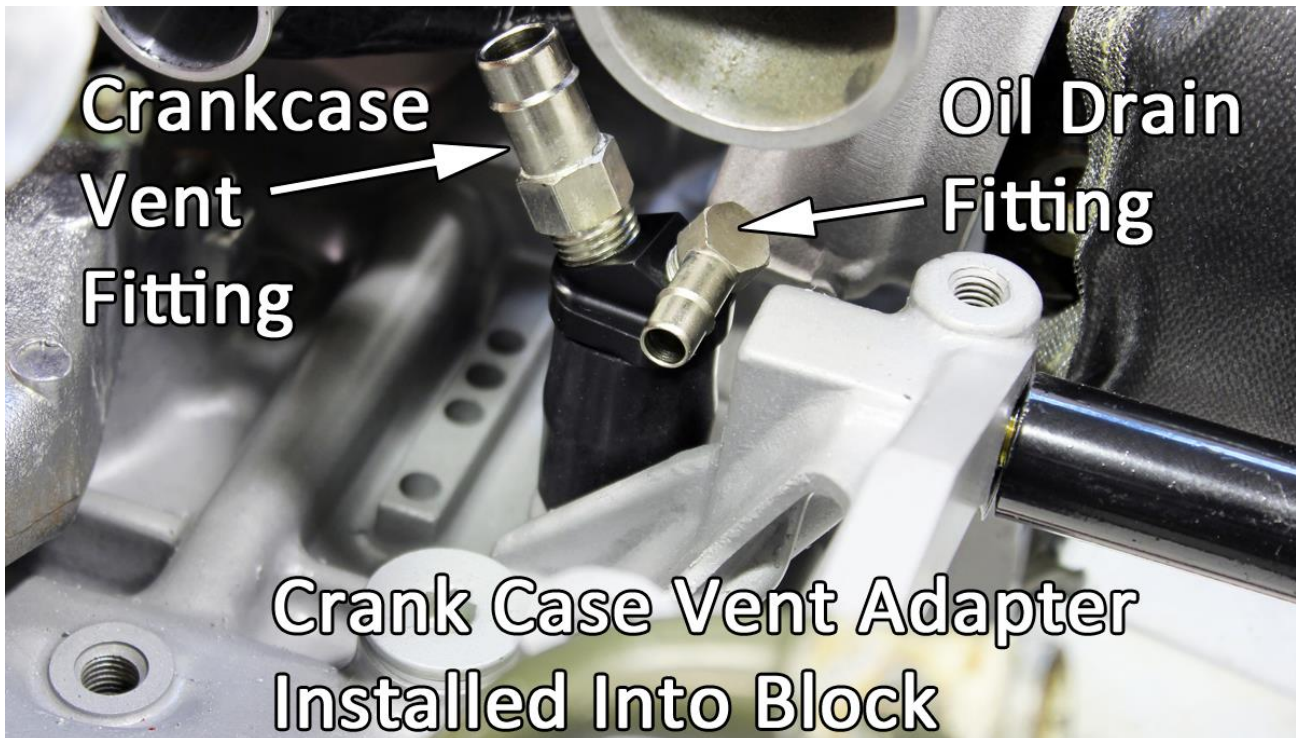

Direction of fitting shown that works for most installations. Fitting can be rotated in any other direction as long as oil draining from the AOS can maintain a downhill path to fitting.

- h. Using diagram above, install supplied 1/2" straight fitting into PERRIN crank case vent adapter. **See NPT Notes above regarding installation of this fitting.**
- i. Install PERRIN crank case adapter into hose on engine crank case vent and secure using supplied 27mm hose clamps.

Crank Case Vent Junction

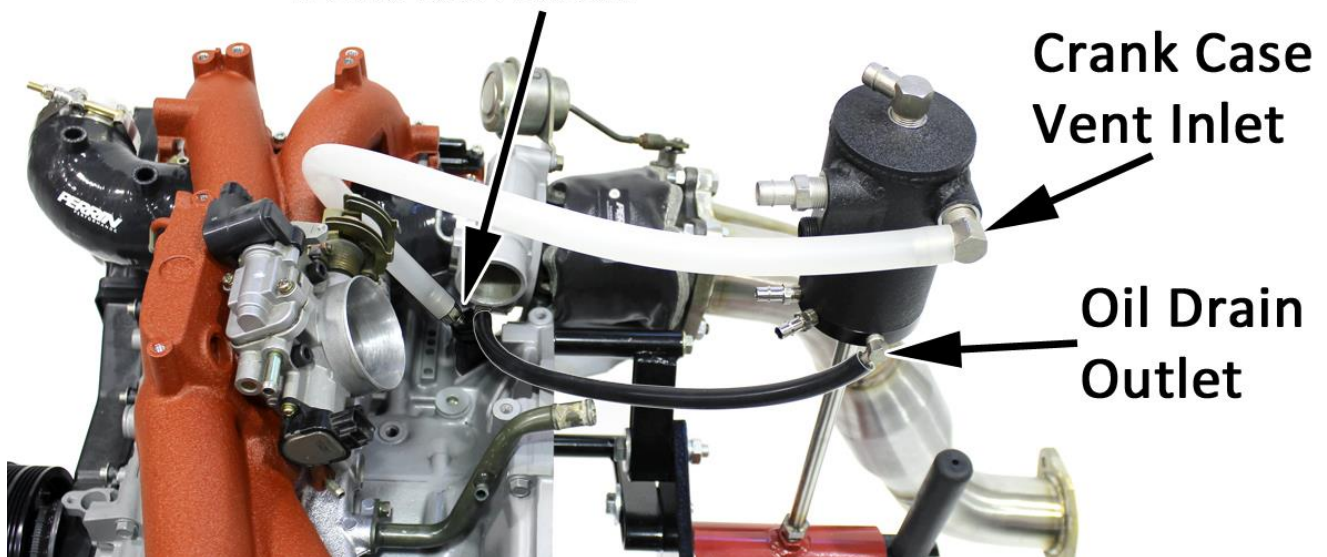


Diagram shows a typical 2008+ STI with simplified path to help visualize routing.

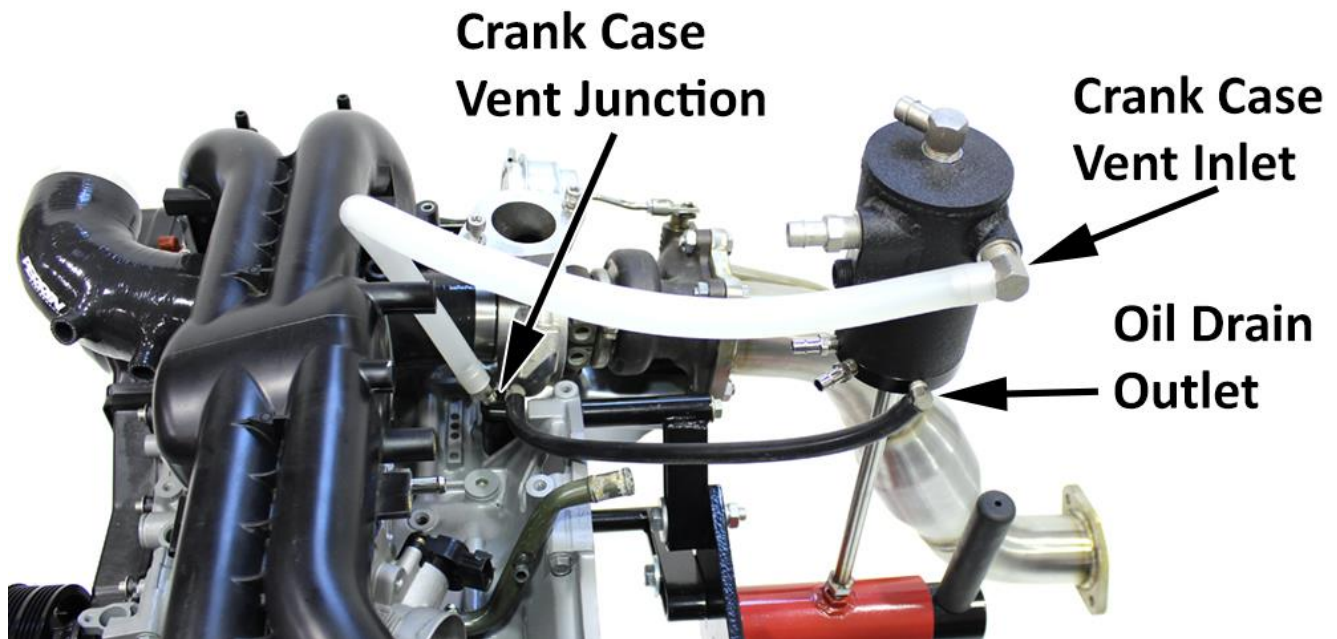


Diagram shows a typical 2008-14 WRX with simplified path to help visualize routing.


- a. Using diagrams above and supplied 5/16" fuel injection hose, connect oil drain outlet on bottom of AOS to 5/16" 90 degree fitting on PERRIN crank case vent junction. Secure both ends using supplied #2 hose clamps. **NOTE: It is very important to route this hose such that it NEVER travels uphill from bottom of AOS to crank case vent fitting. Also during this step it is important to orient bottom so drain and the next step of installing coolant feed, has the cleanest path to engine.**
- b. Using diagrams above and supplied 1/2" Emissions Hose, connect 1/2" fitting on PERRIN crank case vent junction to 1/2" fitting on side of AOS. The direction of this fitting is not critical and can be adjusted to fit your installation. Use supplied #3 clamps to secure both ends. **NOTE: Routing of this vent hose is not that important, just makes sure it is not pinched off while traveling to AOS body.**
- c. For cars that see an extreme amount of high G's or an excessive amount of blow by, we recommend a slightly different installation for the crank case vent hoses. See special notes below for this.

7. Valve Cover Vent Inlet Connections

Your Subaru engine has a valve cover vent on both left and right heads that need to be routed to the AOS. The method for doing this can vary depending on the desired setup. Read through all 3 options below before deciding which is best for your setup.

- a. Most all models (except 2002-2003 WRX) will appear to have two vents on each valve cover and two crank case vents, only one set of these are considered vents, the other set we consider balance vents. These balance vents connect both valve covers to center crank case vent together with piping and hoses, and are to be left alone. Using diagram below, locate valve cover vents that toward the front of the engine, and connect to piping on intercooler.

Do Not Use Rear Crankcase Balance Vents

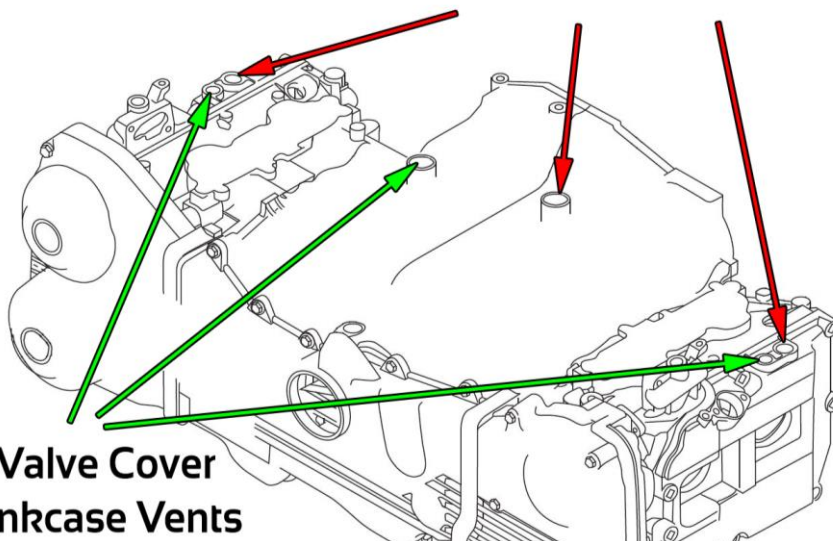


Correct Valve Cover and Crankcase Vents


- b. Once proper set of valve cover vents are located, decide how you want to connect them to the AOS. If installing with a PERRIN front mounted intercooler, the 2nd and 3rd options are the only ones that will work. Some aftermarket intercoolers may use the OEM valve cover vent piping (which was bolted to the top mounted intercooler) and in those cases, the first option may be the best:
 - i. Use OEM piping on top mounted intercooler as the "T" connection, and use only one of the two AOS valve cover inlet ports. With most all front mounted intercoolers installed and 2008-14 WRX models, this may be the best method of installation. Continue to Step "c" below.

- ii. Join both valve cover vents using supplied "T" or "Y" connector, replacing all OEM hoses with supplied 1/2" emissions hose and using only one valve cover vent inlet port on AOS. This method is preferred if OEM hoses are old and hard, or aftermarket parts may be installed affecting installation. (Shown below in picture of AOS on engine stand). Continue to Step "d" below.
- iii. Connect each valve cover vent separately to each of the AOS valve cover vent inlet ports. This method is what we recommend to provide the best venting while under high lateral G forces. If connecting each vent separately, skip to step "g".
- c. If you are using the OEM piping as your "T" connection, install (1) supplied 1/2" barbed 3/8NPT straight fitting into one of the AOS valve cover vent inlets. Install supplied 3/8NPT plug into remaining valve cover vent inlet. **See NPT Notes above regarding installation of these fittings.**
 - i. For 2002-2007 WRX and all STI models, remove OEM rubber hose from piping on intercooler connecting to turbo inlet hose. Using supplied 1/2" emissions hose connect pipe on intercooler to 1/2" fitting installed on AOS valve cover vent inlet port. See diagram below showing piping or "T" Junction on intercooler and hose connecting it to the AOS. Continue to Step 8.

**Remove Hose
From Piping
Here**

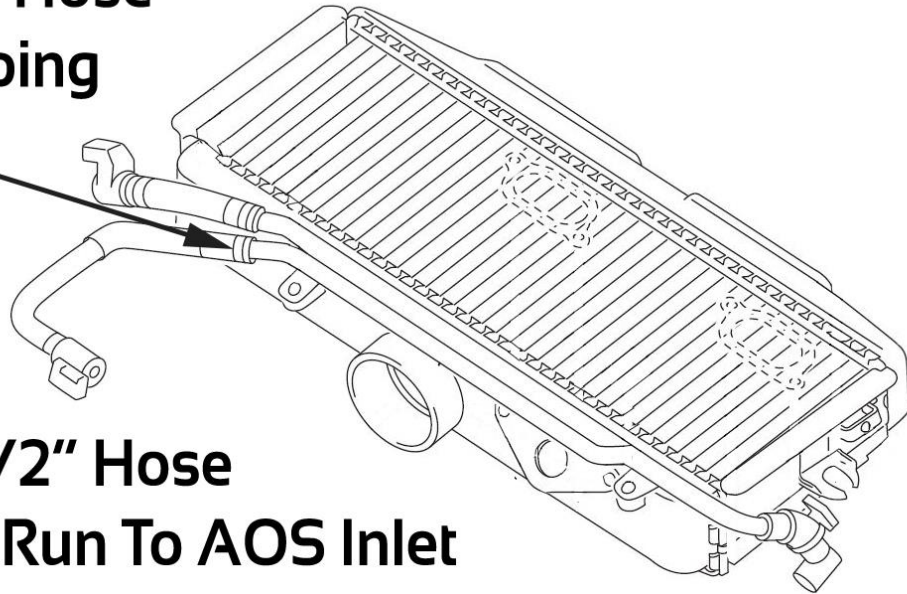


**Connect 1/2" Hose
To Piping, Run To AOS Inlet**

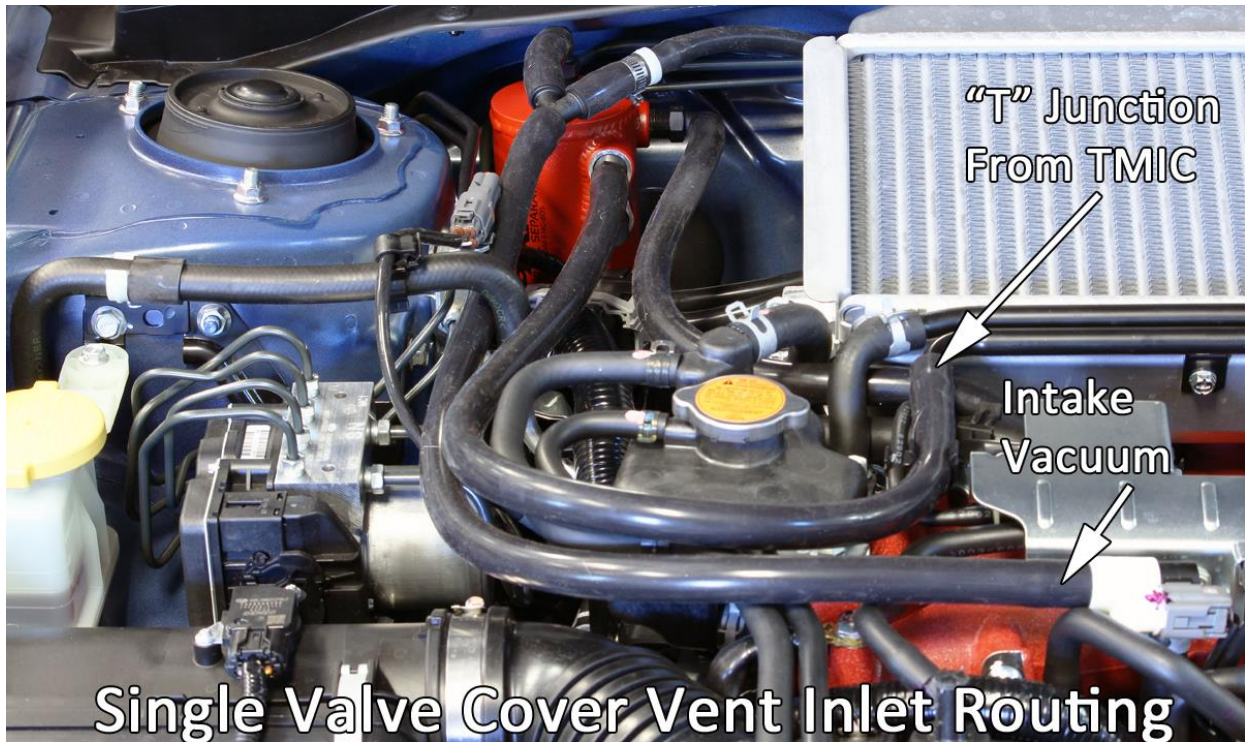


The above setup shows a simple setup that uses the OEM valve cover vent piping (bolted to the intercooler). The extra port on AOS that gets plugged, is not seen in the picture above as the hose is covering it up.

- ii. For 2008-14 WRX models, locate OEM rubber hose connecting plastic valve cover vent piping to turbo inlet hose. Remove bolts securing plastic piping to intake manifold and pull away from engine to remove rubber hose from inlet hose. Install supplied 5/8"-1/2" connector into rubber hose. Install supplied 1/2" emissions hose to fitting and route hose under manifold to AOS valve cover vent inlet port. See diagram below showing piping or "T" Junction on intake manifold. Reinstall plastic valve cover

pipng to intake manifold. Continue to Step 8.

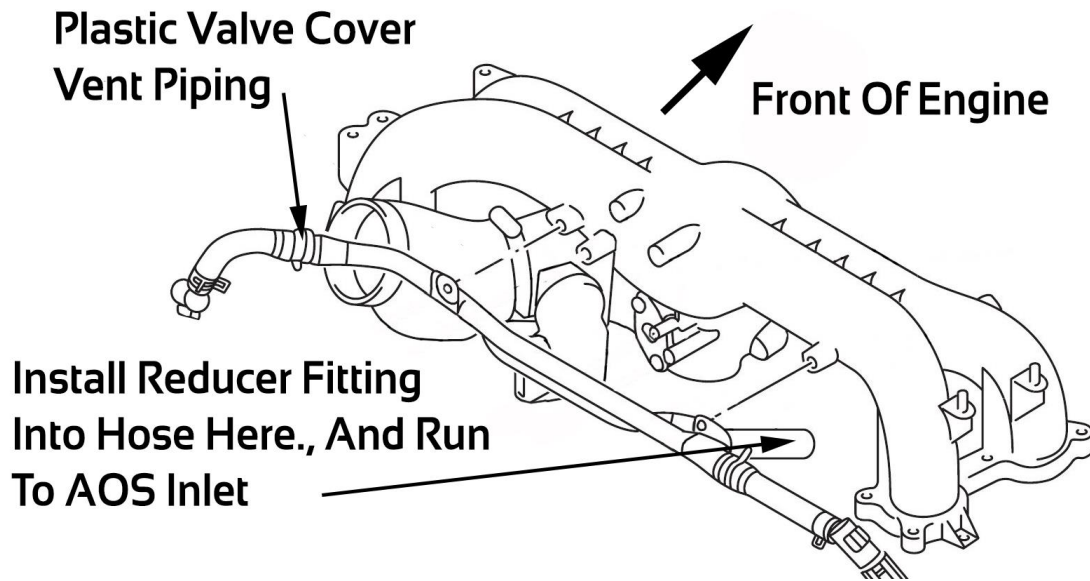

- d. If you are connecting both valve cover vents to the AOS using supplied hose and "Tee" or "Y" fitting, install (1) supplied 1/2" barbed 3/8NPT straight fitting into one of the AOS valve cover vent inlets. Install supplied 3/8NPT plug into remaining valve cover vent inlet. **See NPT Notes above regarding installation of this fitting.**

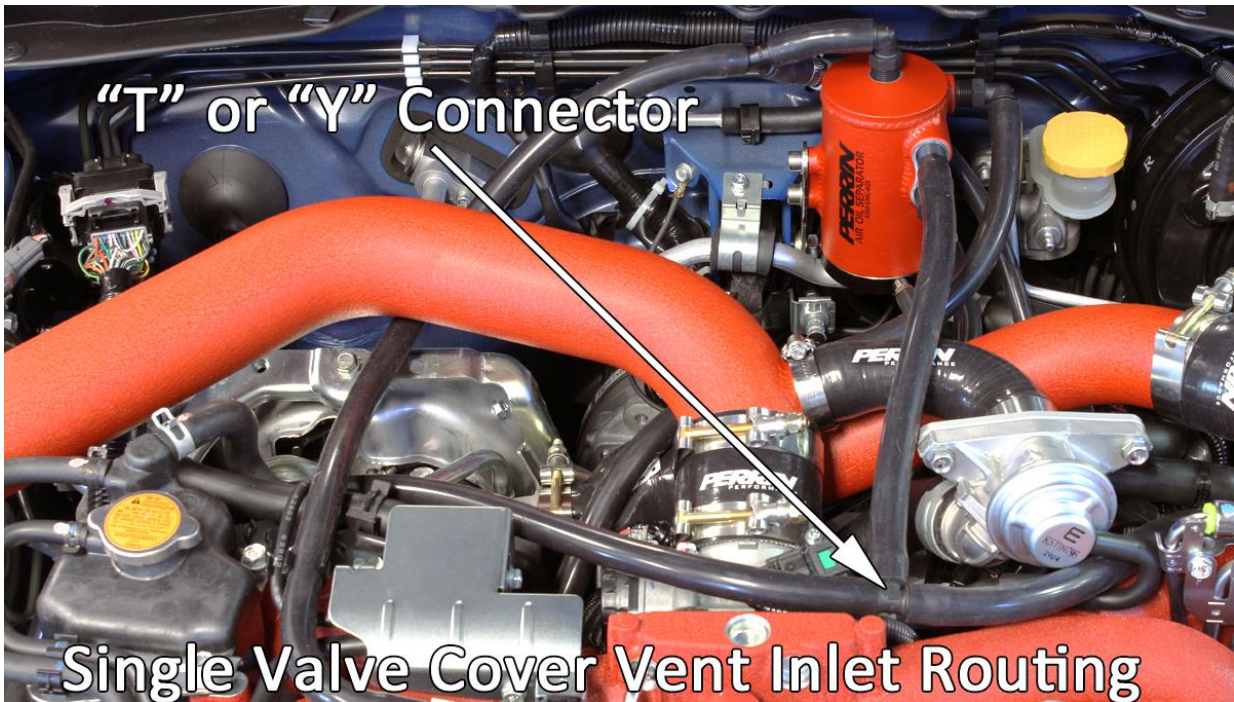

Above is one example showing the use of OEM "T" junction on a 2002-07 WRX/04+ STI

- e. Remove all OEM valve cover vent hoses and piping up to turbo inlet hose. This step varies from WRX to STI and model year to model year.
- For 2002-7 WRX and 2004+ STI models, install supplied 1/2" emissions hose onto each valve cover vent, join left and right side with supplied "Y" or "T" connector, and secure with supplied clamps. See diagram below showing "Y" connector being used. **NOTE: We recommend removing all OEM rubber valve cover vent hoses as they become very brittle over time.**
 - For 2008-11 WRX models, locate and remove plastic valve cover vent piping from engine. See diagram above and below showing plastic piping and its location. Install supplied 1/2" emissions hose onto each valve cover vent port. Join left and right side with supplied "Y" or "T" connector, and secure with supplied clamps.

Valve Cover Vent Routing Using “Y” or “T” Junction



Diagram shows simplified hose routing for 2002-11 WRX and 2004+ STI model.


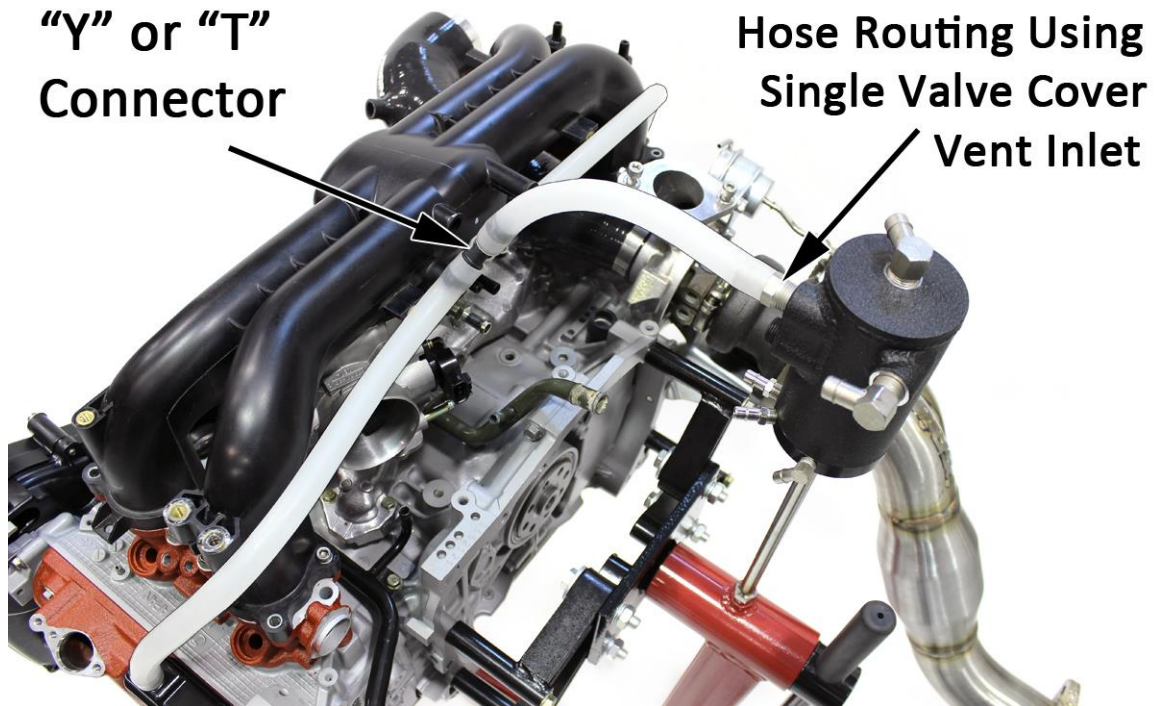



Diagram shows simplified hose routing for 08-14 WRX.

- iii. For 2011-14 WRX and 2017+ STI models, take note of additional PCV diagnosis connectors on each hose coming off valve cover vents. See diagram below showing this. Remove hose between PCV diagnosis connectors and intercooler piping (leaving them electrically connected) and install supplied 1/2" emissions hose onto each fitting. Join left and right side with supplied “Y” or “T” connector, and secure with supplied clamps. If done correct, hoses from valve covers to PCV diagnosis connector will be left alone. See additional diagram below showing “Y” connector being used

2017+ STI Has Added PCV Diagnosis Connectors On Each Side

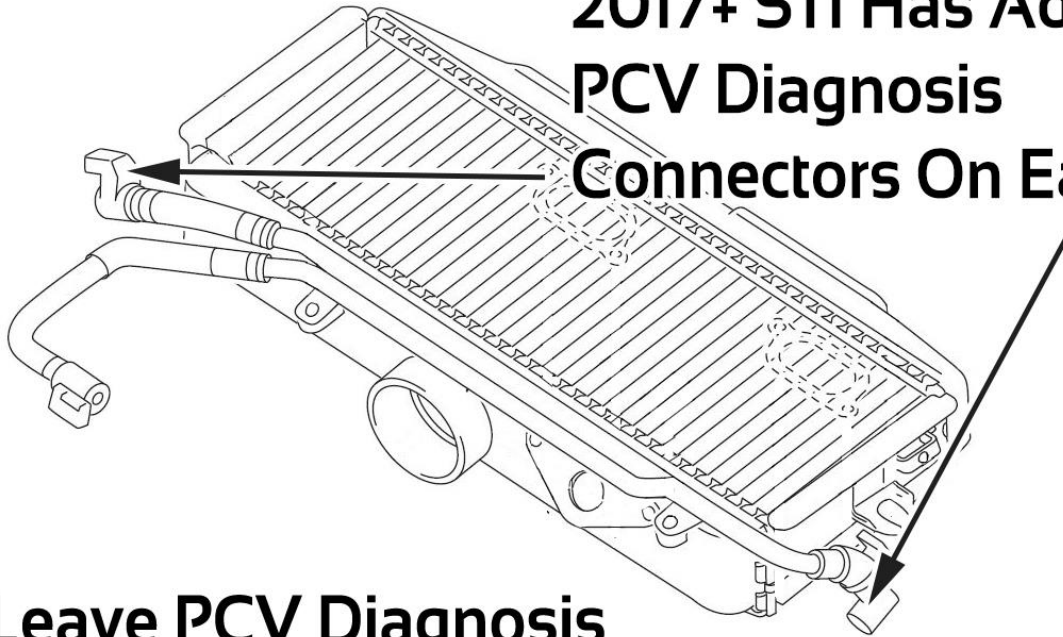

Leave PCV Diagnosis
Connectors Electrically Connected And
Remove Hose From Connector

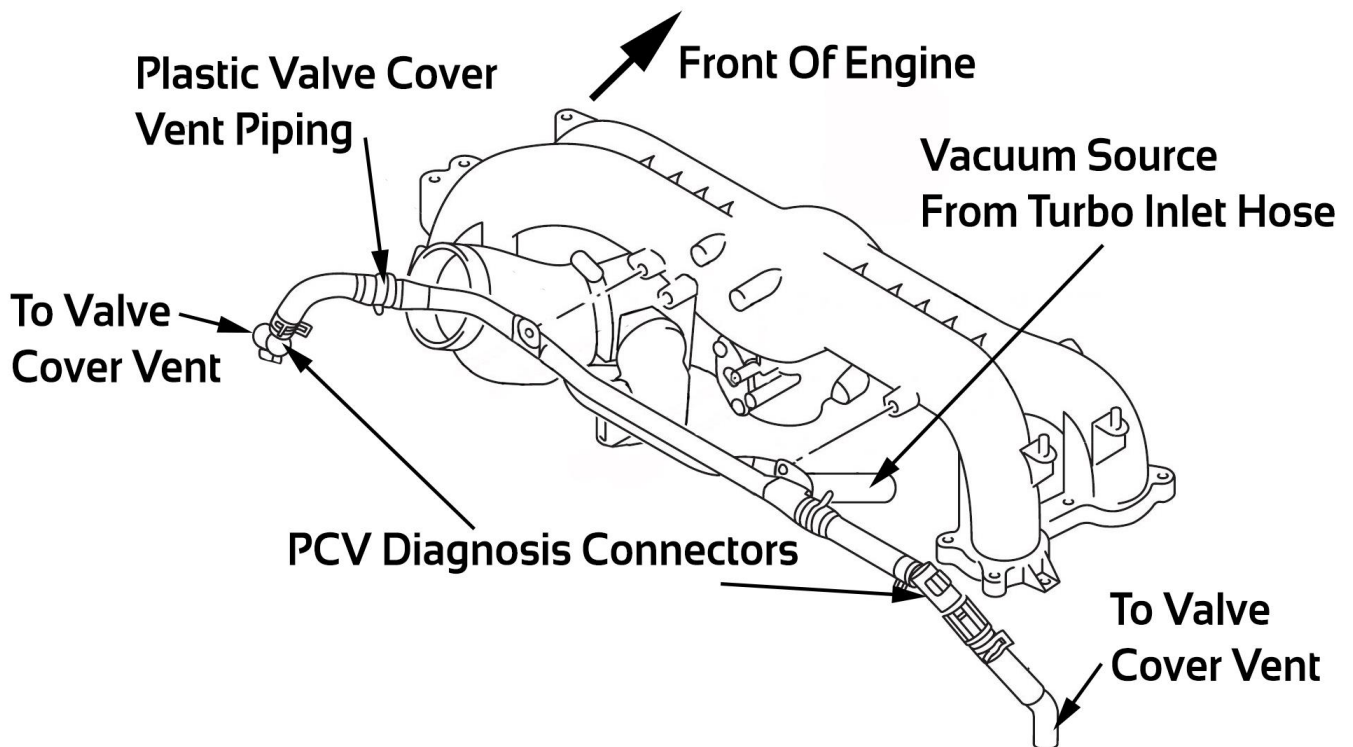

- f. Connect third leg of "Y" or "T" to 1/2" fitting used on AOS valve cover vent inlet port. You can see in the diagrams typical routing found on the most common setups. Continue onto Step 8. **NOTE: Make sure that the routing of hoses does not interfere with moving parts or travel over extremely hot parts like a turbo or downpipe.**
- g. If you are connecting each valve cover vent separately to the AOS, install supplied 1/2" barbed 3/8NPT straight fittings into each of the valve cover vent inlet ports. **See NPT Notes above regarding installation of this fitting.**



Dual Valve Cover Vent Inlet Hose Routing

Above diagram shows 04+ STI using both valve cover vent inlets on AOS body.

- h. Follow above instructions, but instead of using a "T" or "Y" to join each valve cover together, run 1/2" emissions hose to each of the 1/2" fittings installed into the AOS valve cover vent inlet ports. Secure with supplied #3 hose clamps. Note: Make sure and route hoses away from moving parts and away from extremely hot engine parts like the turbo and downpipe.


8. Outlet and PCV Connection

The AOS outlet is the top threaded hole on body. This connection needs to be connected to the turbo intake system in front of the turbocharger, and behind the air filter. **NOTE: We do not recommend leaving this fitting open as oil and oil vapor can still come out under certain conditions, which can create a mess or combust if exposed to extreme heat.**


There are two options to connect the AOS to your intake system. One is installing it with the PCV system functioning, and the other is removing the PCV system. The PCV is a 1-way valve that provides crank case ventilation during idle and light load situations, but it can also be a partial source of oil vapors getting into sucked into the intake manifold. For most street driven vehicles, installing the PCV valve is a good idea, but for built motors and track cars, we recommend removing this. Read through all instructions below, then read PCV Delete Instructions, before deciding how to proceed.

- a. Along this hose (connecting AOS top to intake system) we recommend installing the "Y" connection used for the PCV (positive crankcase vent). The PCV is a 1-way valve that provides crank case ventilation during idle and light load situations. This valve is important to install as described or boost pressure will be lost and there will be no positive crankcase ventilation occurring. **NOTE: The PCV connection can be skipped for certain applications, see special note below regarding this.**
- b. Locate PCV junction removed from engine block in earlier step and remove PCV valve from junction as shown below. 2002-03 WRX models can skip this step and go to step "d".

Remove PCV Valve from OEM crank case fitting

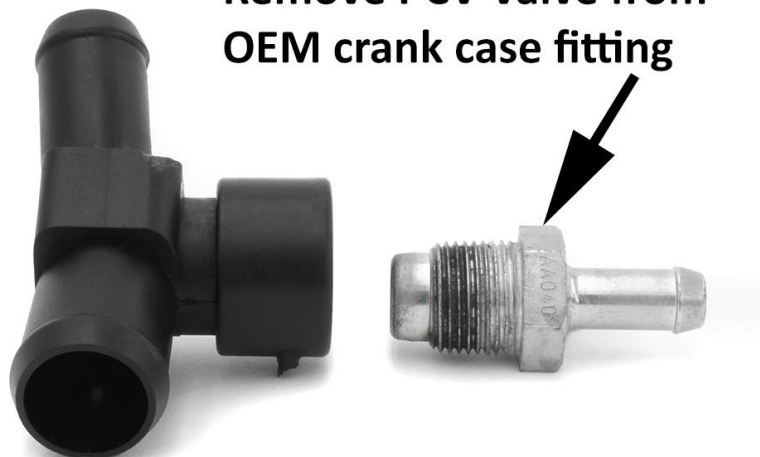


Thread OEM PCV into female barb fitting

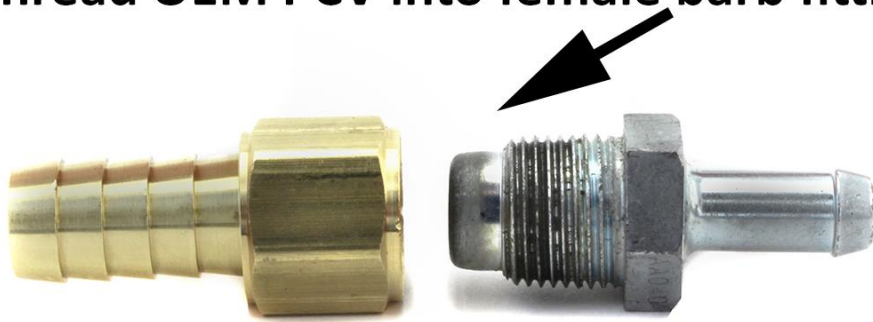


Remove PCV Valve From OEM Crank Case Junction

Rubber junction from 2011+ WRX model shown above.

- i. For models with plastic junction, this can be tight to remove and may require a vise to hold housing while fitting is unscrewed. It may be necessary to use solvent or a thread penetrating oil to free from housing.
 - ii. Once PCV is removed, install into supplied brass fitting and tighten down. **See NPT Notes above regarding installation of this fitting.**
 - iii. Models (2011-14 WRX only) that have the rubber type junction, simply remove PCV valve and install into hoses as shown in later steps.
- c. Install supplied 1/2" barb 3/8NPT 90 degree connector into top of AOS. **See NPT Notes above regarding installation of this fitting.**
- d. Locate previous PCV vacuum connection on intake manifold.
- i. For 2002-03 WRX's, connect supplied 1/2" emissions hose over PCV valve (screw into intake manifold). This is a tight fit and will require a bit of stretching of hose as well as some force to push it over larger fitting. Use supplied #3 clamp to secure. Do not cut hose to length at this time.
 - ii. For 2004-07 WRX and 2004+ STI models, this port is located under the throttle body as shown below. Connect supplied 3/8" hose to fitting and secure with clamp. Do not cut hose to length at this time.
 - iii. For 2008-14 WRX models, this port is located on a steel plate bolted to the middle of the back of the intake manifold as shown below. Connect supplied 3/8" hose to fitting and secure with clamp. Do not cut hose to length at this time.

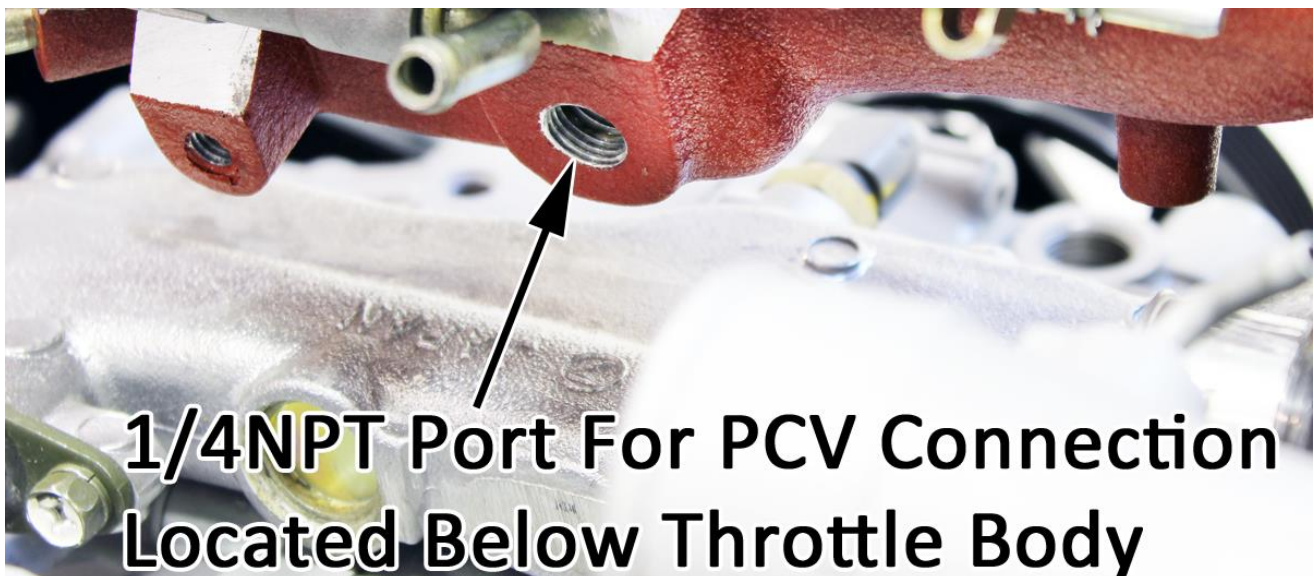


Above picture shows PCV port connection on 2002-07 WRX and STI models.

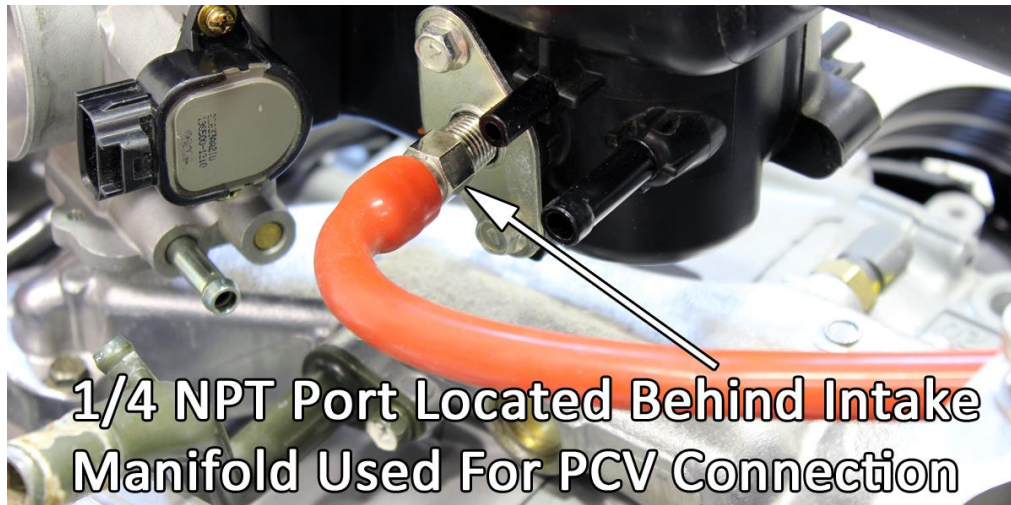


Above picture shows PCV port on 2008-14 WRX manifold.


- e. Using supplied 1/2" emissions hose, connect AOS outlet (top fitting) to intake vacuum source at turbo inlet hose.
 - i. For 2002-07 WRX and 2004-11 STI models, cut OEM rubber vacuum hose after bends. Use supplied 1/2"-1/2" black plastic connector to join OEM rubber hose to 1/2" emissions hose. See diagram below.

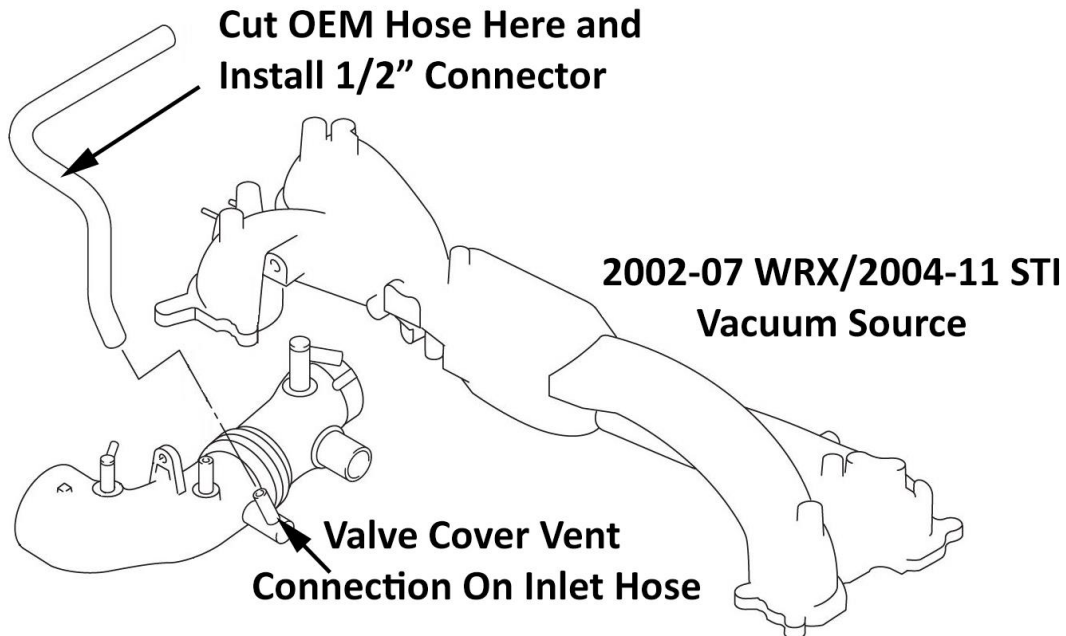

- ii. For 2012+ STI models, remove OEM rubber vacuum hose at white PCV diagnosis connector and connect 1/2" emissions hose to fitting. Make sure to leave electrical connection connected or a check engine light will occur. See example diagram below.

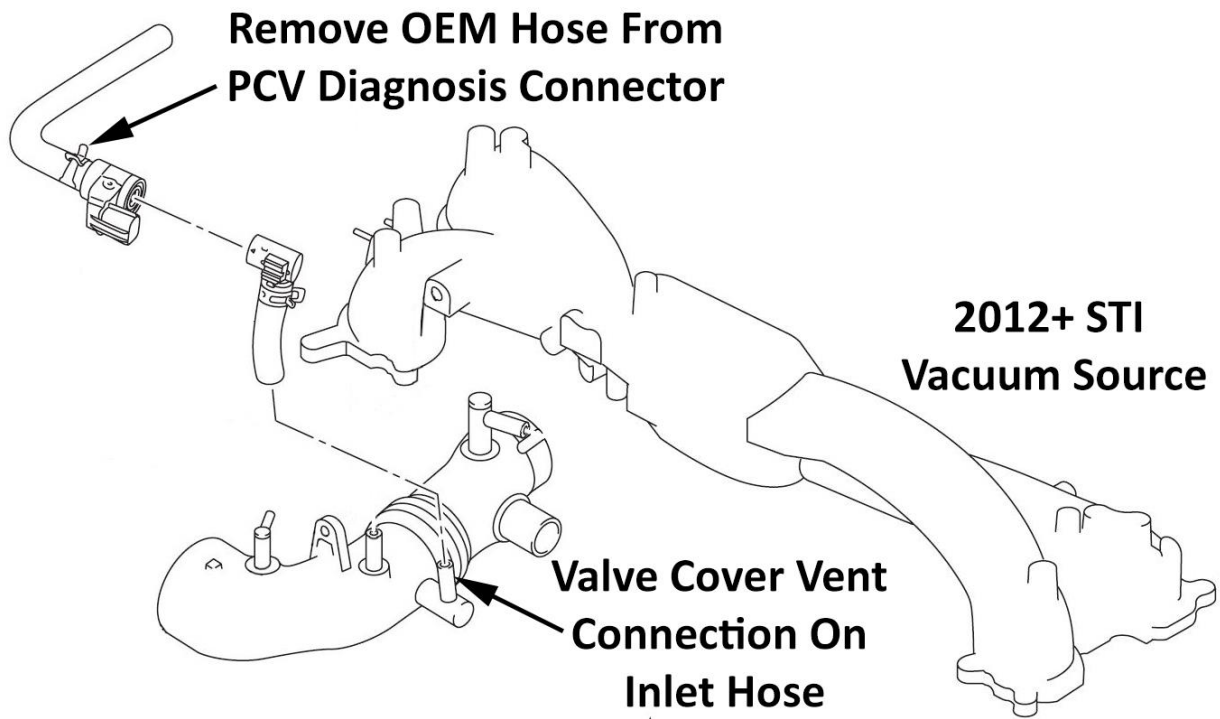

- iii. For 2008-14 WRX models, locate fitting on turbo inlet hose (as shown below) located under intake manifold. Make sure that short rubber hose is left on turbo inlet hose. Install supplied 1/2"-1/2" fitting into short rubber hose and secure with supplied clamps.

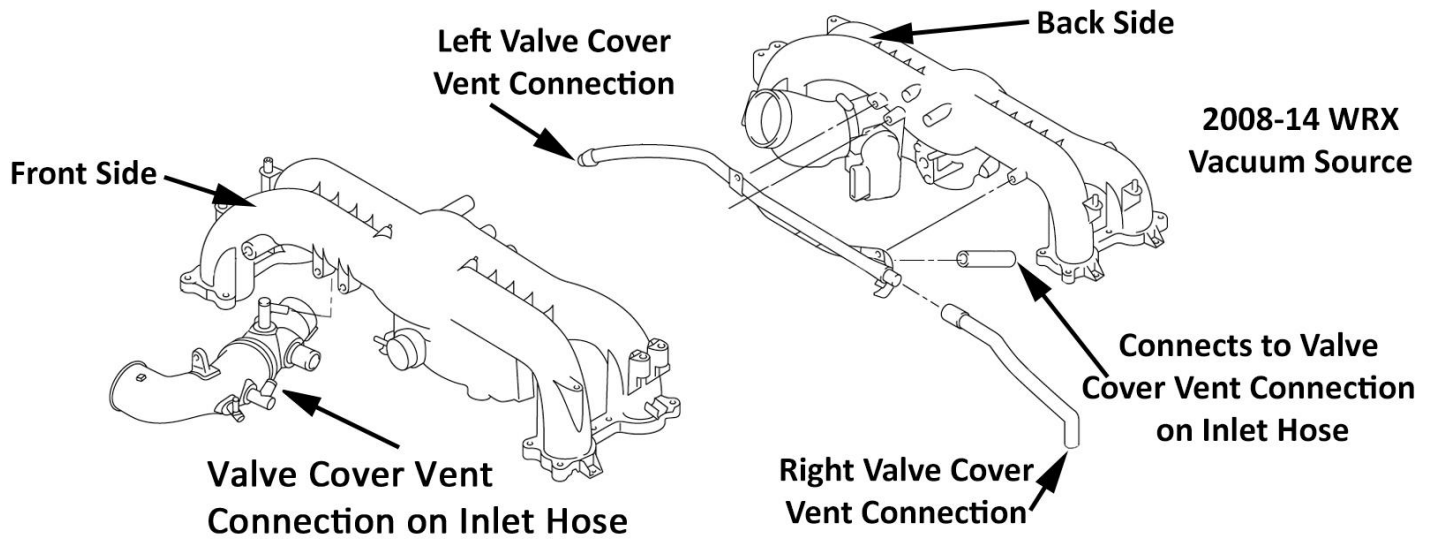


- iv. Vehicles with aftermarket turbo inlet hose will use one of the above installation methods depending on what is supplied with the inlet hose. If installing with PERRIN inlet hose, no additional fittings are needed.




Above picture shows PCV connection on AOS outlet with hose routing behind AOS body.

- f. Decide where to install PCV valve (one- way valve) and "Y" connector along 1/2" emissions hose coming from AOS outlet. **NOTE: The location of this is not important as long as it's along the hose between the AOS top and the turbo intake system.** Below are a couple diagrams with different options as to where to make this junction.

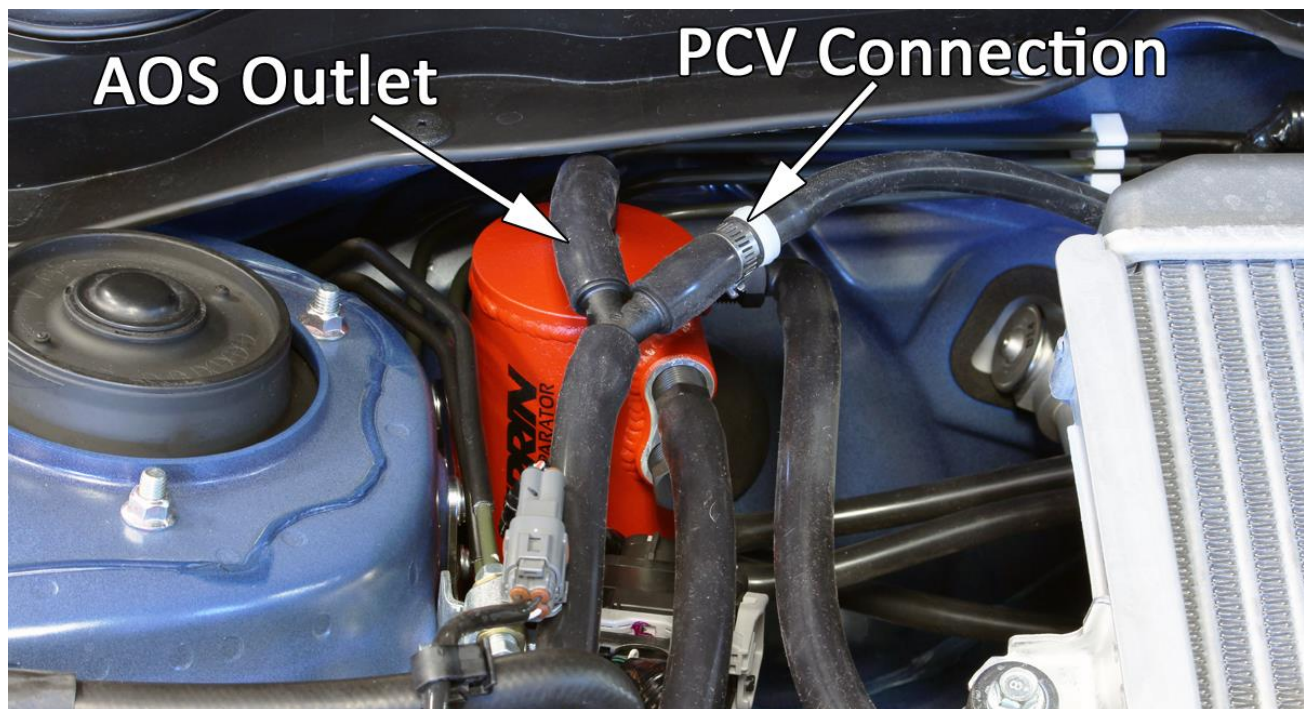

Picture shows another view of the Y junction installed at AOS, and PCV location. PCV location does not need to be this close to AOS.

- g. Once desired location is found, cut 1/2" emissions hose and install supplied "Y" connector making sure to aim 3rd leg back toward AOS away from Turbo Intake Vacuum source. Use above and below diagrams to give you a better idea how this can be setup. It is not critical as to the location of PCV valve itself. It can be located close to intake manifold or right at AOS outlet and it will not affect how system works.

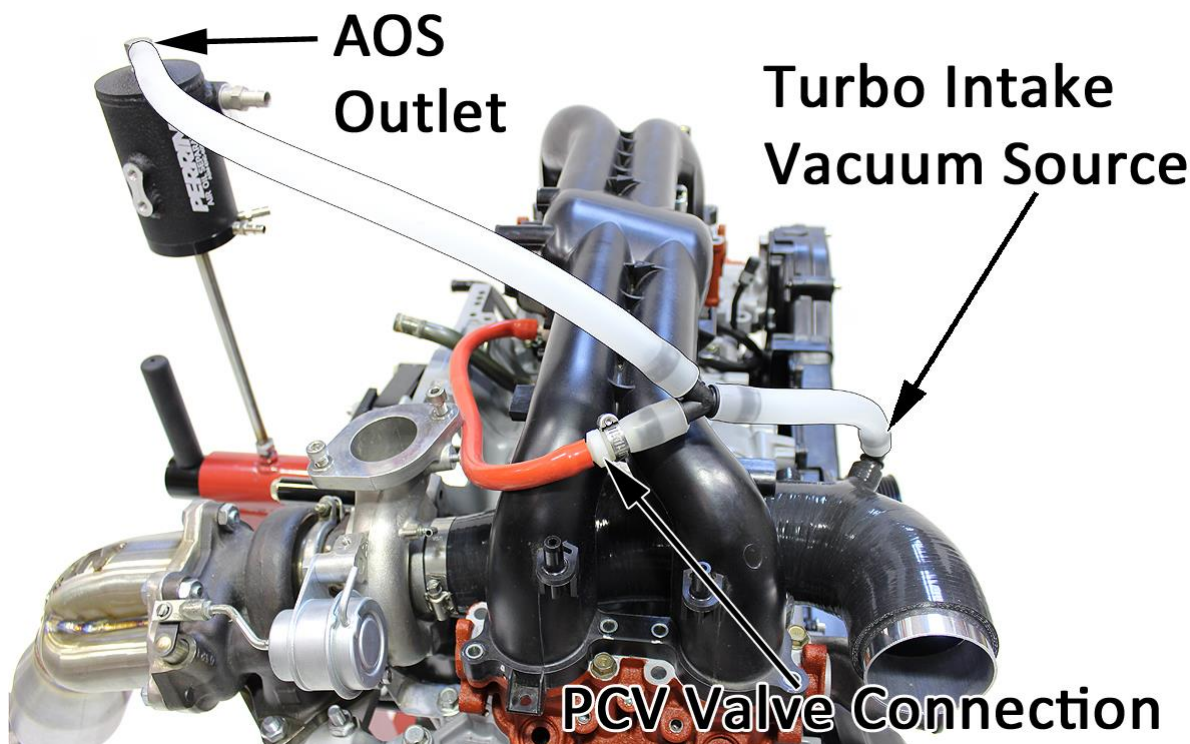

Above picture shows typical 08-14 WRX setup.

**Connect To Hose Going
To Intake Manifold**



**Connect To Hose Going
Toward "Y" Connector**


Above diagram shows PCV valve removed from 2011+ WRX PCV junction.

9. After AOS is completely installed, double check that all hoses and vacuum lines are connected and secured using a clamp. Any leak in the system can cause the engine to run poorly and will lead to unsafe engine conditions.
10. Check that all bolts and hardware securing AOS are tightened down.
11. Reconnect throttle body to intake manifold. **NOTE: Gasket can be reused if it was not damaged during installation.**
12. Using supplied zip ties, secure wire harness (removed in earlier step) toward shock tower or frame rail. **NOTE: Keep away from turbo charger to ensure no damage from heat occurs.**
13. Using supplied zip ties, secure emissions hoses to engine and other hoses to reduce the chance of abrasion wearing down hoses over time.
14. Reinstall intercooler pipes removed earlier and start car. Ensure its running as it was before. Turn off engine and add any coolant that was lost during installation. Restart engine and take car for test drive. If car is misfiring or check engine light occurs, recheck all aspects of install.
15. After roughly 10 minutes of driving, recheck all fittings for signs of leaking. If leaks are found stop and fix ASAP.


PCV Delete for Cars with Built Engines or Increased Amount of Blow-by

While we do not recommend this for street driven cars, some racecars may want to disconnect the PCV side of the system as this can lead to some oil vapors getting into the intake manifold. For those who understand these risks and understand the reason for removing the PCV connection, please follow the below alternate instructions.

- Locate port on intake manifold that PCV was hooked up to. Remove fitting and install supplied 1/4NPT plug into manifold. **NOTE: This is a tapered type of fitting and seals when tight, not when bottomed out. Take care in not over tightening fitting as this can damage intake manifold. See NPT Notes above regarding installation of this fitting.**

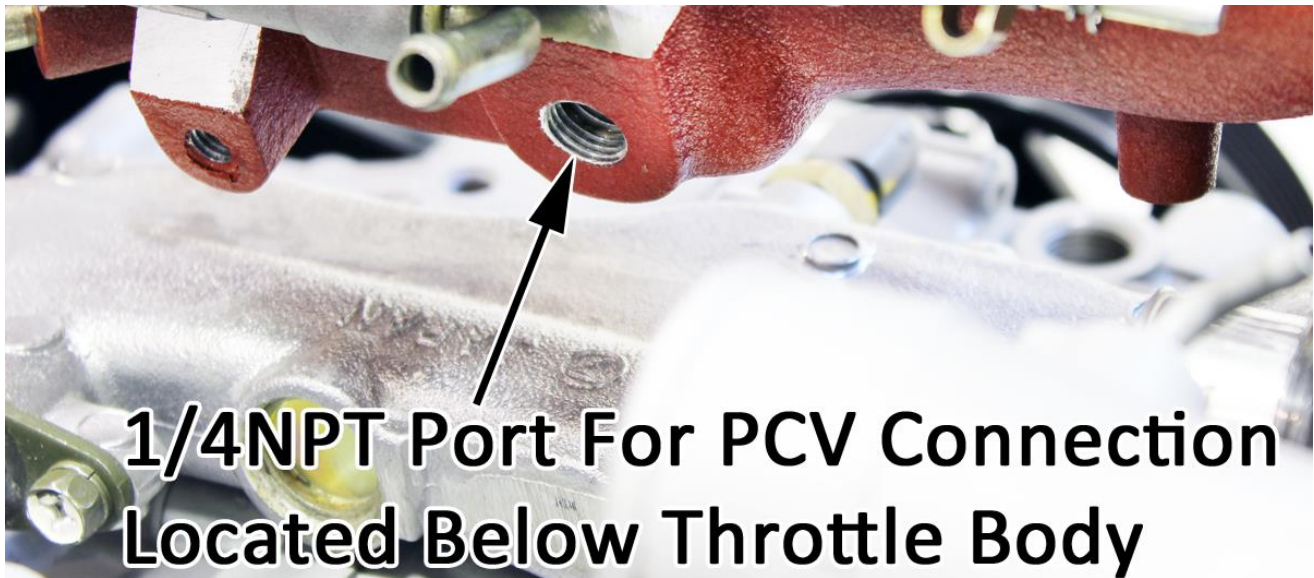

Above picture shows PCV port connection on STI model.

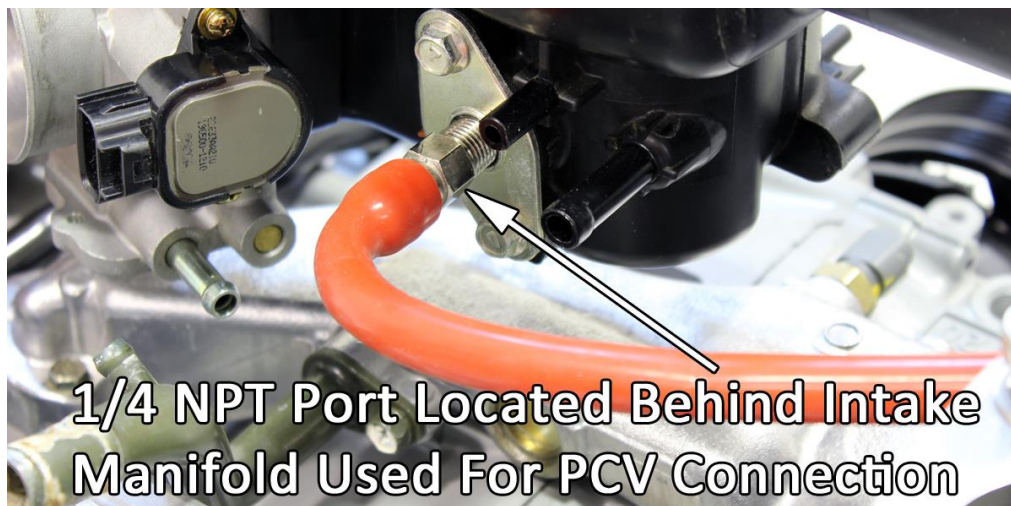


Above picture shows PCV port on 2008-14 WRX manifold.

- Using supplied 1/2" emissions hose, connect AOS outlet to intake system somewhere before turbo and after air filter.
- Secure hoses with supplied hose clamps.

Maintaining your Air Oil Separator

- There is very little maintenance required with the PERRIN AOS. From time to time you may want to remove it and clean out some of the oil from the inside. Before taking apart, double check you have the spare o-ring incase you find the o-ring is damaged.
- Leaving coolant hoses and oil drain hoses attached to bottom, remove bolt in bottom of AOS using an M5 wrench and remove AOS Body from car. Take note of nylon washer under head of bolt or located in AOS bottom. If this is damaged or missing, please call tech support and order another one.
- Remove foam filter/diffuser from AOS body and using a biodegradable degreaser, liberally spray and let it sit for a few minutes. Wash out with warm water until it rinses clean water and is free of oil. Do NOT use brake cleaner on this part as it will destroy the foam.
- Using a biodegradable degreaser, liberally spray inside can and let it sit for a few minutes. Wash out with warm water until inside of AOS is clean and free of oil.

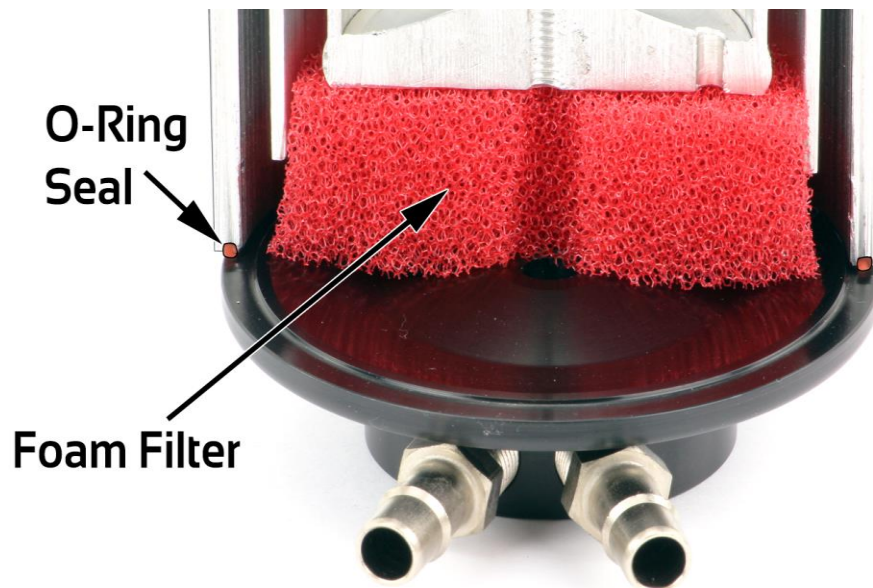

Cutaway Showing Internals of AOS

- Remove and inspect o-ring thoroughly and even remove from bottom to ensure it is not cut or cracked. **Note: Do NOT use brake cleaner to clean O-ring as damage may occur.**
- Install O-ring into groove on into AOS body, making sure it is fully seated in groove and not sticking out.
- Reinstall foam filter/diffuser into AOS body.
- Reinstalled AOS body to bottom, making sure to secure with bolt and nylon washer under head of bolt. Hand tighten bolt, making sure that bottom is lined up with body and o-ring is not sticking past it.

Crank Case Vent Hook Up for Race Cars/Cars with Loosely Built Engines

We have found that to help control oil entering the AOS you can alternatively remove the crank case vent hose from the system, leaving only valve cover vents to do the job of venting crank case pressures. Consult your tuner to decide if this is the best setup for your car.

- Remove fitting on AOS body used for crank case vent and install supplied 3/8NPT plug.
- Remove 1/2" fitting on PERRIN crank case vent junction and install supplied 1/4NPT plug.
- This turns the PERRIN crank case vent junction into a drain-only for your AOS.




Questions, Comments and Suggestions Contact: Tech@PERRINperformance.com

Visit Our Website for Instant Chat Options at www.PERRINperformance.com

Call Our Tech Team at 503-693-1702

OLD INStructions

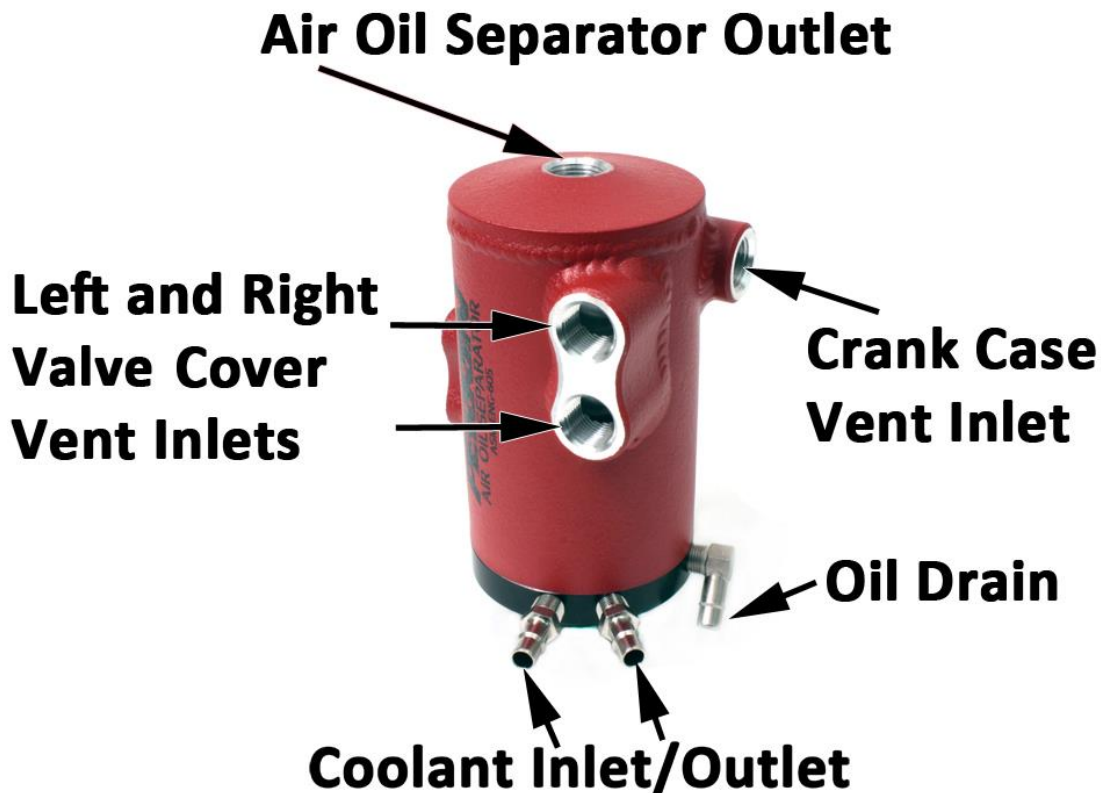


Installation Instructions

1. Using the above diagram as a guide, take note of all fittings and our recommended connections. There are many options and many ways to install this, please read through all instructions before proceeding with install.
2. Locate and remove intercooler tubes coming off turbo outlet and off throttle body. This is necessary to gain access to center crank case vent, PCV system and other items. **NOTE: This step will vary depending on FMIC installed.**


3. Oil Drain Connection

- a. The AOS oil drain is not an optional hook-up as the AOS is not designed to contain oil within itself. This fitting is used to drain the oil that is captured within the AOS body back to the engine through a crank case vent.
- b. Install supplied 5/16" 90 degree nickel plated fitting into oil drain outlet in bottom of AOS keeping in mind that this needs to point downward slightly. **See NPT Notes above regarding installation of this fitting.**
- c. Install supplied 1/2" 90 degree black plastic fitting into crank case vent inlet on side of AOS body. **See NPT Notes above regarding installation of this fitting.**
- d. Using diagrams below, locate OEM PCV/crank case vent junction and remove from engine, turbo inlet hose, and intake manifold. This step will vary depending on car this is being installed on. The same basic steps need to be taken, with removal of junction from car, then capping connection at turbo inlet hose.
 - vi. When removing PCV junction on 2002-03 WRX's, remove everything as shown below, leaving nipple on turbo inlet hose open as well as crank case vent on block. **Note: These don't have the PCV diagnosis connector as shown, just a simple rubber hose.** Continue to step "e".
 - vii. When removing PCV Junction on 2004+ STI and 2005-10 WRX models there is a PCV diagnosis connector with an electrical

connection where hose meets the turbo inlet hose. Remove hose from PCV diagnosis connector, leaving nipple open and electrical connection connected to turbo inlet hose, as well as crank case vent on block fitting open. Continue to step "e".

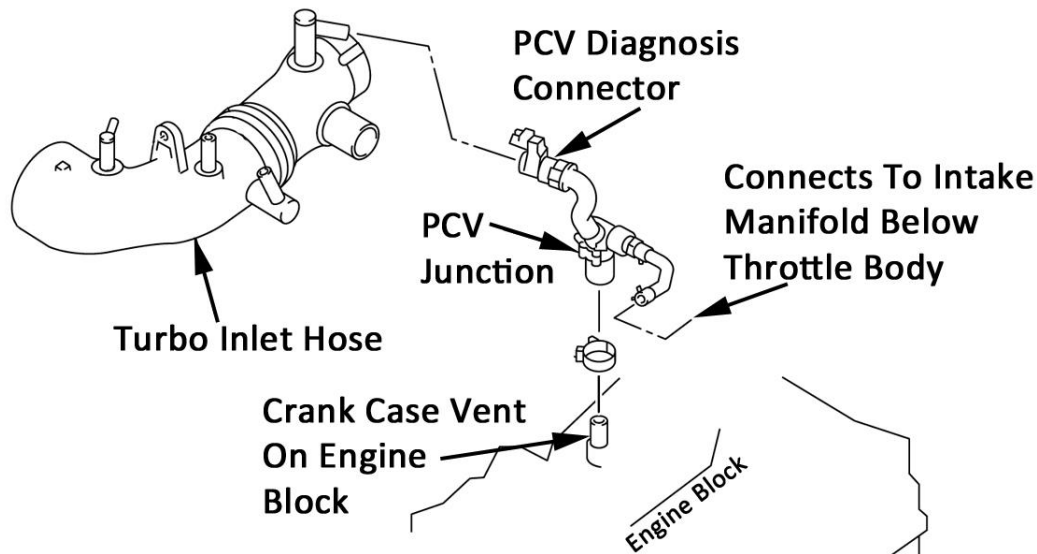


Picture above shows typical 2002-07 WRX, and 2004+ STI PCV Junction. (2002-2003 WRX does not have PCV diagnosis connector)

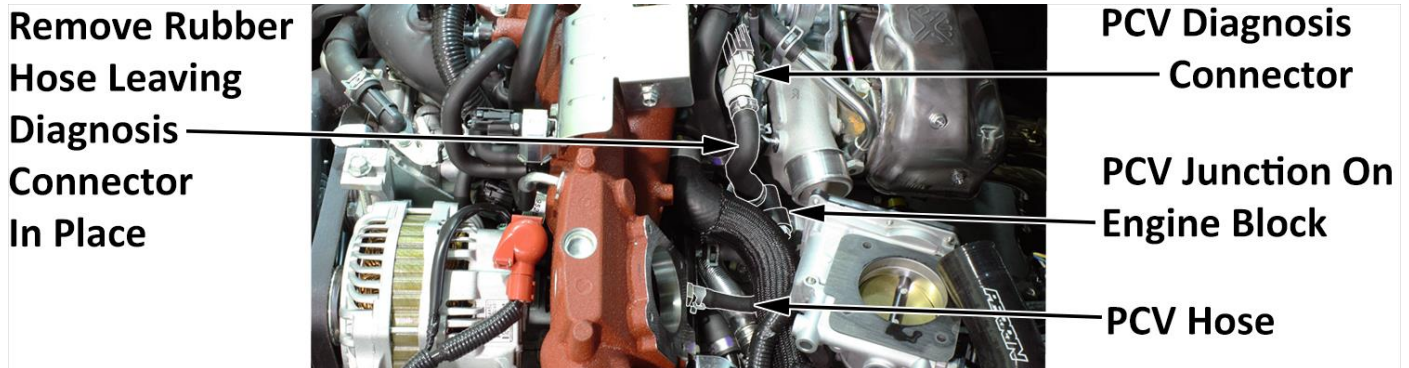

Above picture shows 2008 STI with PCV junction exposed.

- viii. When removing PCV Junction on 2008-10 WRX models, there is a PCV diagnosis connector where the PCV junction meets a hose going to turbo inlet hose (See diagram below). Disconnect PVC diagnosis connector from PCV junction, disconnect electrical plug from PCV junction and remove junction with hoses going to intake manifold and turbo inlet hose. This will leave nipple on turbo inlet hose open as well as crank case vent on block.
- ix. Using pictures below locate pin inside of PCV diagnosis connector and remove using needle nose pliers. Install pin into female pins on grey PCV diagnosis harness. Use electrical tape to secure fitting and protect against it grounding out on components. This step will bypass this sensor so there is no check engine light. Continue to step "e".

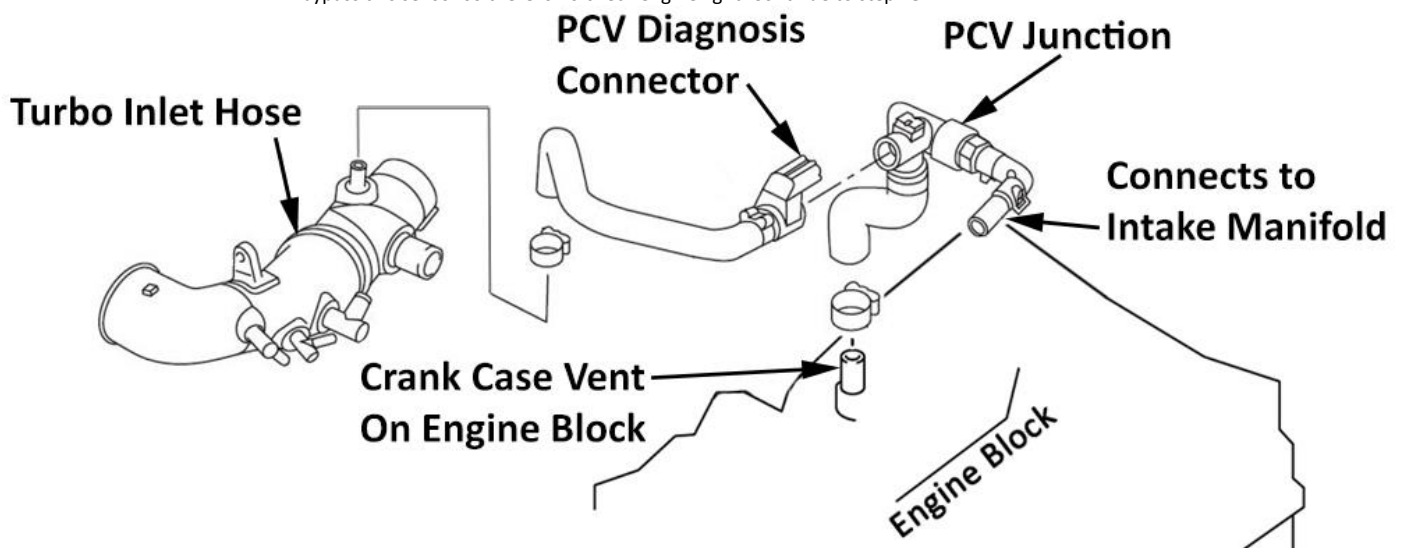

Above diagram shows 2008-10 WRX PCV junction.



Above diagrams show pin being removed from PCV diagnosis connector and the connector with female pins to reinstall it to.

- x. **When removing PCV Junction on 2011-14 WRX models**, there is a PCV diagnosis connector where the PCV junction meets a hose going to turbo inlet hose (See diagrams below). Disconnect PVC diagnosis connector from electrical plug and from PCV junction. Remove junction with hoses going to intake manifold and turbo inlet hose. This will leave nipple on turbo inlet hose open as well as crank case vent on block.
- xi. Using pictures above locate pin inside of PCV diagnosis connector and remove using needle nose pliers. Install pin into female pins into PCV diagnosis harness. Use electrical tape to secure fitting and protect against it grounding out on components. This step will bypass this sensor so there is no check engine light. Continue to step "e".

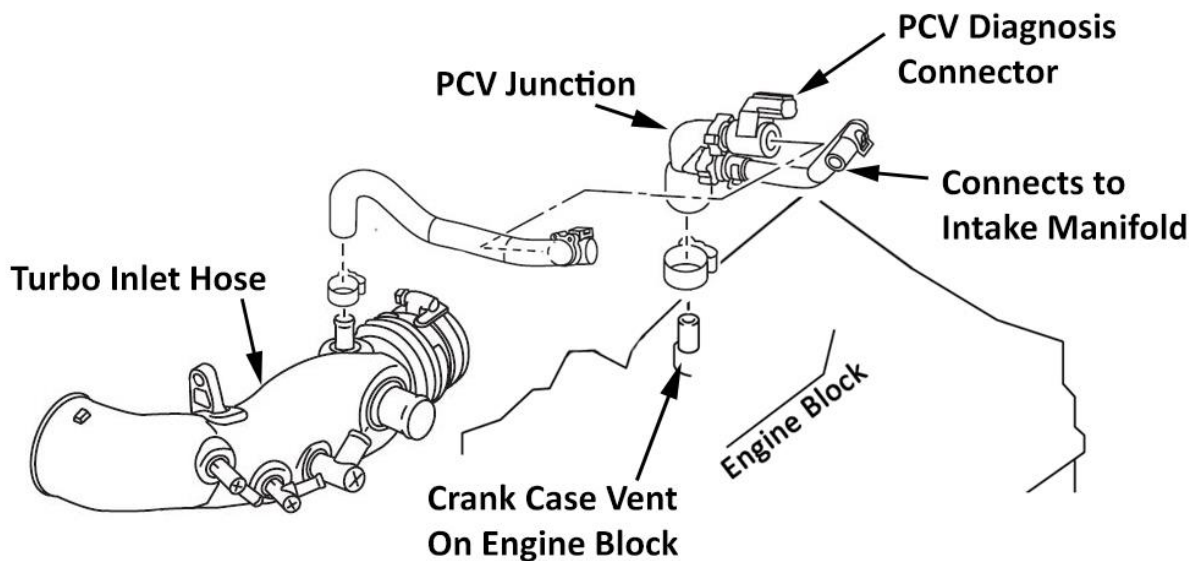


Diagram above shows 2011-14 WRX crank case vent and PCV junction setup.

2011+ WRX PCV Junction




Picture above shows 2011+ WRX PCV Junction with PCV diagnosis connector removed from upper hose.

- e. With PCV junction removed from engine, using supplied 1/2" vacuum cap, plug open connection at turbo inlet hose. This step varies depending on the car:
 - i. 2002-03 WRX models will cap open nipple (points toward middle of engine) on turbo inlet hose.
 - ii. 2004-07 WRX/04+ STI will cap open nipple (points toward middle of engine) on PCV diagnosis connector.
 - iii. 2008-14 WRX will cap open nipple (point's straight up) on turbo inlet hose.
- f. If short rubber hose (3/4"ID x 2" long) was pulled off from crank case in above step, remove from PCV junction and reinstall to engine block as this is used to connect PERRIN crank case vent adapter to engine block as shown below. Remove upper pinch clamp from hose and loosely

install supplied 27mm clamp. **NOTE: For 2008+ WRX install supplied 3/4" hose over fitting on box and secure with additional supplied 27mm clamp. Trimming of hose will be necessary.**

- g. Using diagram below, install supplied 5/16" 90 degree black plastic fitting into PERRIN crank case vent adapter making sure to aim in the direction shown below or in a direction that allows oil to travel downhill from AOS bottom. See NPT Notes above regarding installation of this fitting.

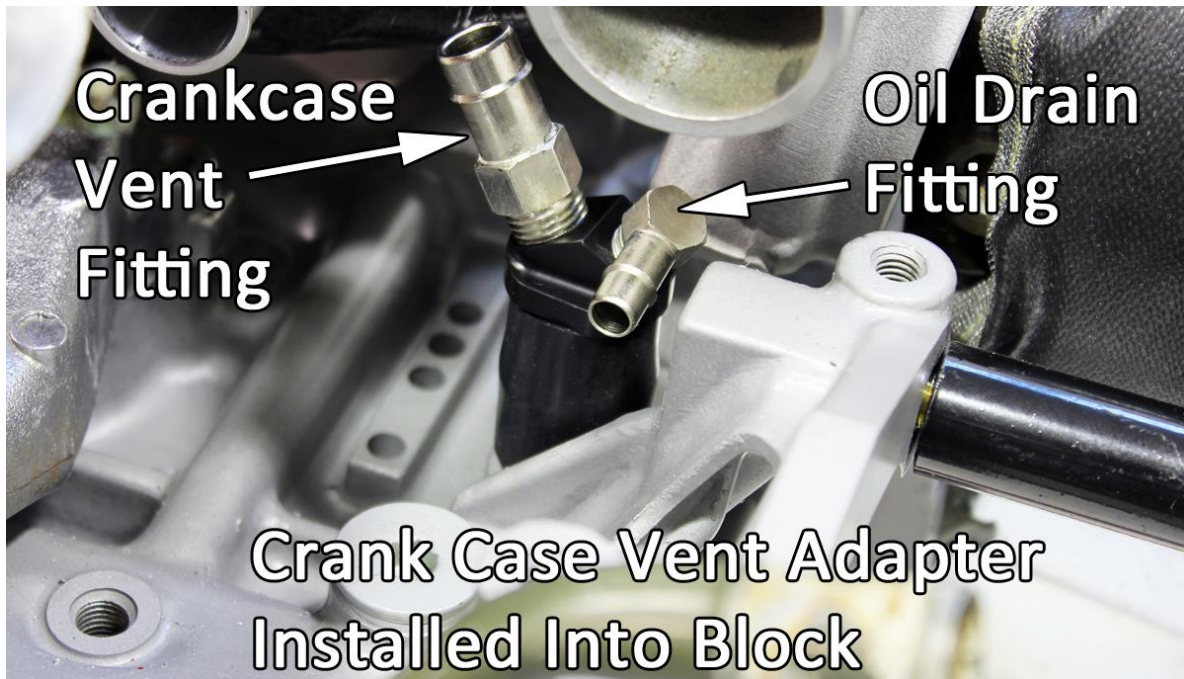

Shown with optional nickel plated fittings from upgrade kit PSP-ENG-608. Use black plastic connectors on these connections.

- d. Using diagram above, install supplied 1/2" straight black plastic fitting into PERRIN crank case vent adapter. See NPT Notes above regarding installation of this fitting.
- e. Install PERRIN crank case adapter into hose (3/4"ID x 2" Long) on engine crank case vent and secure using supplied 27mm hose clamp.

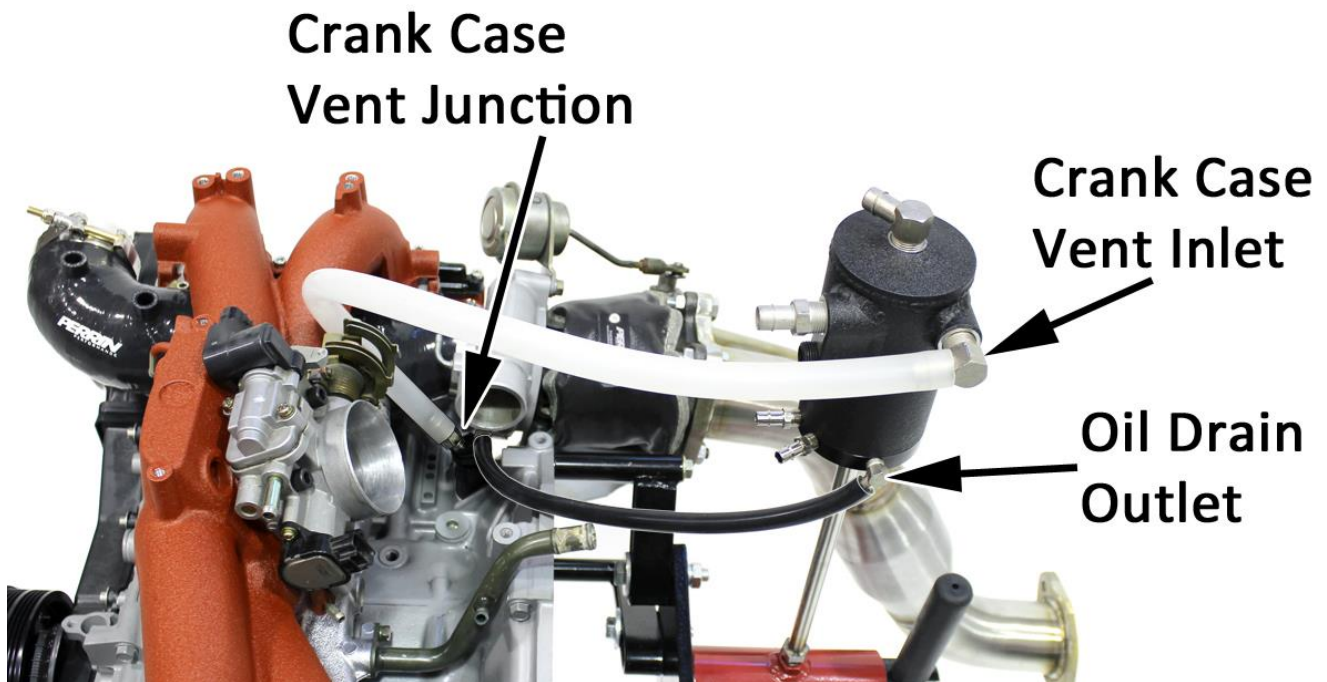


Diagram shows a typical 2002-07 WRX/04+ STI with simplified path to help visualize routing. Optional nickel plated fittings are shown on AOS body.

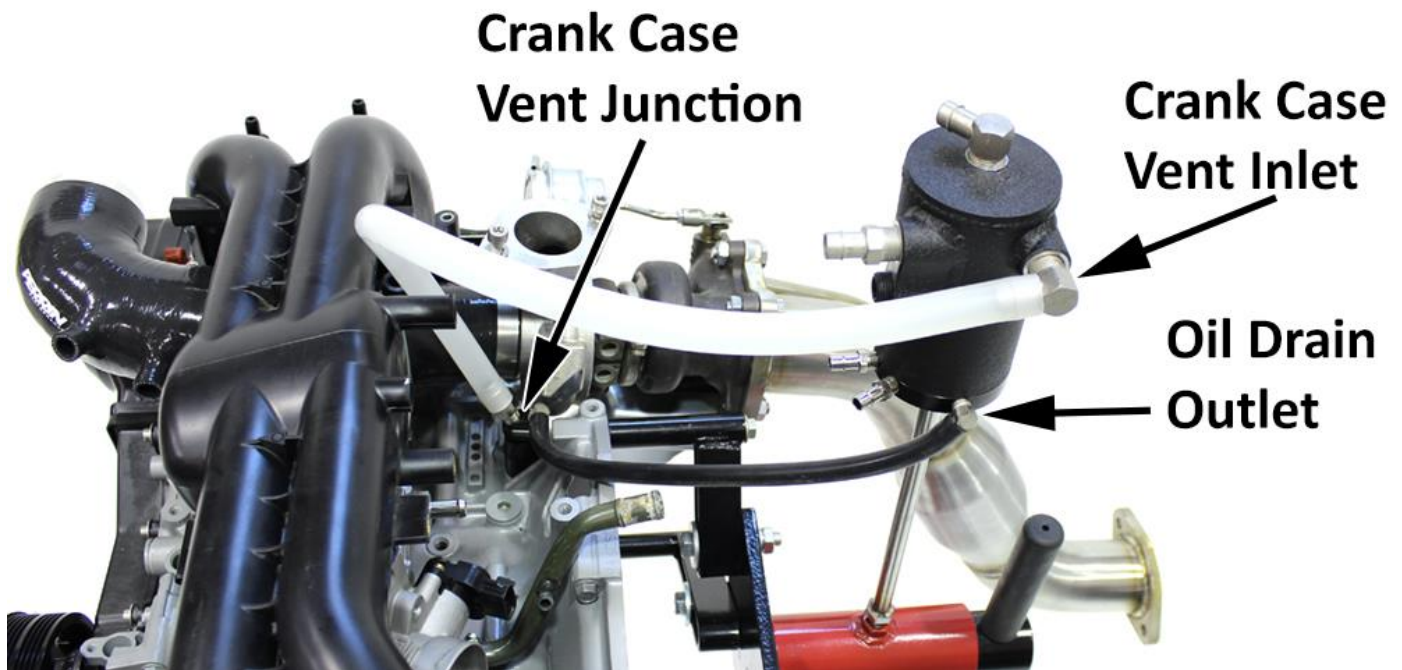


Diagram shows a typical 2008-14 WRX with simplified path to help visualize routing. Optional nickel plated fittings are shown on AOS body.

- f. Using diagrams above and supplied 5/16" fuel injection hose, connect oil drain outlet on bottom of AOS to 5/16" 90 degree black plastic fitting on PERRIN crank case vent junction. Secure both ends using supplied #2 hose clamps. **NOTE: It is very important to route this hose such that it NEVER travels uphill from bottom of AOS to crank case vent fitting. Also during this step it is important to orient bottom so drain and the next step of installing coolant feed, has the cleanest path to engine. Again, DO NOT seal AOS bottom to body until final orientation has been settled on!!**
- g. Using diagrams above and supplied 1/2" Emissions Hose, connect 1/2" fitting on PERRIN crank case vent junction to 1/2" fitting on side of AOS. The direction of this fitting is not critical and can be adjusted to fit your particular installation. Use supplied #3 clamps to secure both ends. **NOTE: Routing of this vent hose is not that important, just makes sure it is not pinched off while traveling to AOS body.**
- h. For cars that see an extreme amount of high G's or an excessive amount of blow by, we recommend a slightly different installation for the crank case vent hoses. See special notes below for this.

4. Coolant Feed Connections


- a. The coolant connection is NOT an optional hookup, as connecting these up reduce water vapor and sludge that can build up in AOS. The easiest connection to get coolant from is the throttle body, as all Subaru models have the same coolant connections on the throttle body that can be used. Other connection points can be used as long as there is some coolant flow through the hoses. **NOTE: Installing coolant connection will cause some coolant loss and coolant spill. Make sure to top off coolant after installation is complete.**



Picture above shows 04+ STI throttle body. 02-05 WRX throttle body will appear slightly different. See 2008+ WRX images below.

- a. Install supplied 5/16" straight nickel plated fittings into bottom coolant ports on AOS. **See NPT Notes above regarding installation of this fitting.**
- b. Locate coolant hose on throttle body (shown above and below) that will be used to supply coolant to AOS bottom.
- c. Disconnect coolant hose from throttle body and install supplied 5/16"-5/16" plastic adapter into hose. Secure with OEM pinch clamp.
- d. Install supplied 5/16" coolant hose to 5/16" plastic adapter and route hose to either coolant feed fitting on AOS bottom. Cut hose to

length, install onto fitting and secure both ends using supplied #2 hose clamp. **NOTE: During this step it is important to orient AOS bottom so coolant feed hoses, have the cleanest path to engine. DO NOT seal AOS bottom to body until final orientation has been settle on!!**

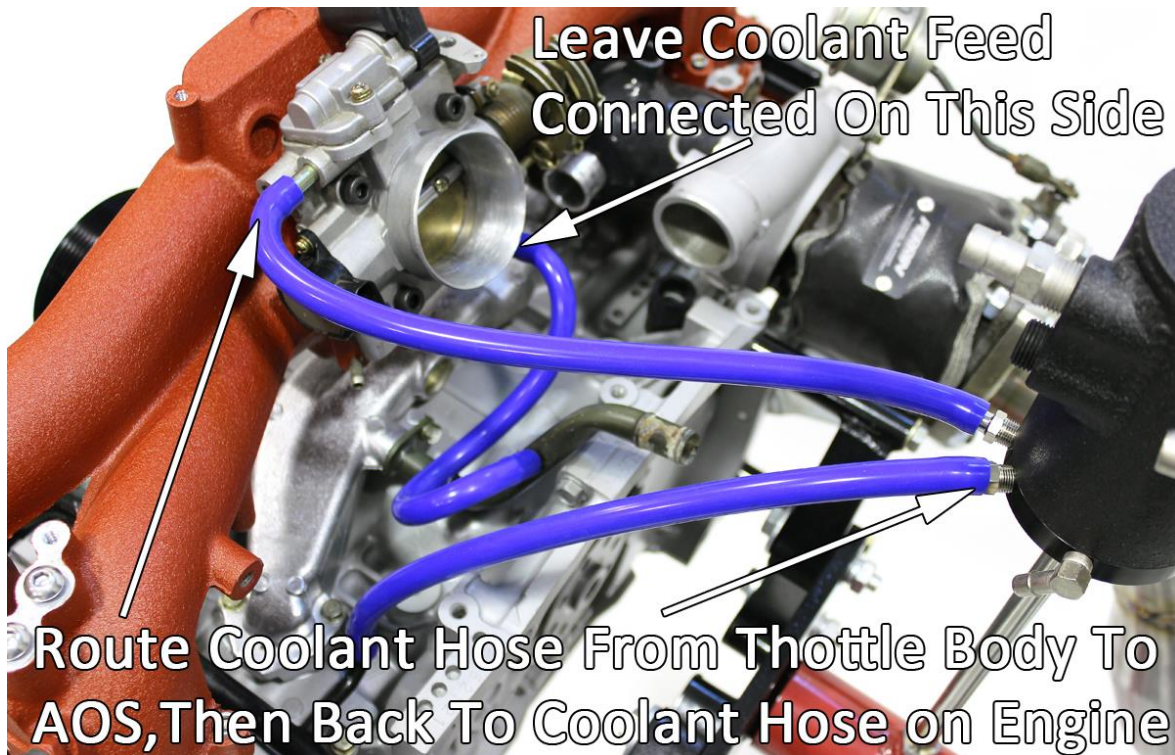

Actual routing of hoses may not be represented above. Diagram shows simplified path to help visualize routing.




2008+ WRX coolant hose routing shown above. Diagram shows simplified path to help visualize routing.

- e. Install remaining 5/16" coolant hose to 5/16" fitting on AOS bottom and secure with supplied #2 clamp. Route hose back to fitting left open on throttle body and secure with supplied #2 hose clamp. **NOTE: This is the final step that may affect the orientation of AOS bottom. It is now ok to follow procedures to seal bottom with RTV in next step.**
- f. Using above diagram, you can see the coolant hose connections for all cars. This diagram has been simplified to show the hose routing. Hoses can be routed differently depending on where the AOS is mounted or if intercooler plumbing requires this. Keep in mind that the coolant fittings on the AOS become part of the coolant path from engine to throttle body.


5. Valve Cover Vent Inlet Connections

- a. Your Subaru engine has a valve cover vent on both left and right heads that need to be routed to the AOS. The method for doing this can vary depending on the desired setup. **Special Note: Most all models will appear to have two vents on each valve cover, only one set of these are considered vents. Locate vents that connect left valve cover to center crank case vent, then to right valve cover. These sets of hoses/vents are considered the balance hoses and are to be left alone. DO NOT remove or tee into these hoses!**
- b. Once proper set of valve cover vents are located, decide if you want to:
 - i. Join both valve cover vents using supplied hoses and "T" or "Y" connector, or using OEM hoses and pipes and "T" section. This method is the simplest for most applications, especially 2008-14 WRX's where the OEM hoses and pipes are molded tight to intake manifold and or have multiple PCV diagnosis connectors installed. If choosing this method continue to step "c" below.
 - ii. Connect each valve cover vent separately to each of the AOS valve cover vent inlet ports. This method is what we recommend to provide the best venting while under high lateral G forces. For 2011+ WRX's, this requires bypassing of (2) PCV Diagnosis connectors. If connecting each vent separately, skip to step "h".
- c. If you using supplied crank case vent hose and "T"/"Y", or OEM hoses and pipes as your "T" connection, install (1) supplied black plastic 1/2" barbed 3/8NPT straight fitting into one of the AOS valve cover vent inlets. Install supplied black plastic 3/8NPT plug into remaining valve cover vent inlet. **See NPT Notes above regarding installation of these fittings.**
- d. Using diagrams below for reference, either create "T" junction with supplied hardware or locate OEM "T" junction to connect to:
 - i. If creating a "T" junction using supplied hardware, remove all OEM valve cover vent hoses and piping all the way to turbo inlet hose. Install supplied 1/2" emissions hose onto each valve cover vent, join left and right side with supplied "Y" or "T" connector, and secure with supplied clamps. See diagram below showing "Y" connector being used. **NOTE: When possible, we recommend removing all OEM rubber valve cover vent hoses as they become very brittle over time.**
 - ii. Connect third leg of "Y" or "T" to 1/2" fitting used on AOS valve cover vent inlet port. You can see in the below diagram typical routing found on the most common setups. Continue onto Step 8. **NOTE: Make sure that the routing of hoses do not interfere with moving parts or travel over extremely hot parts like a turbo or downpipe.**

Valve Cover Vent Routing Using "Y" or "T" Junction

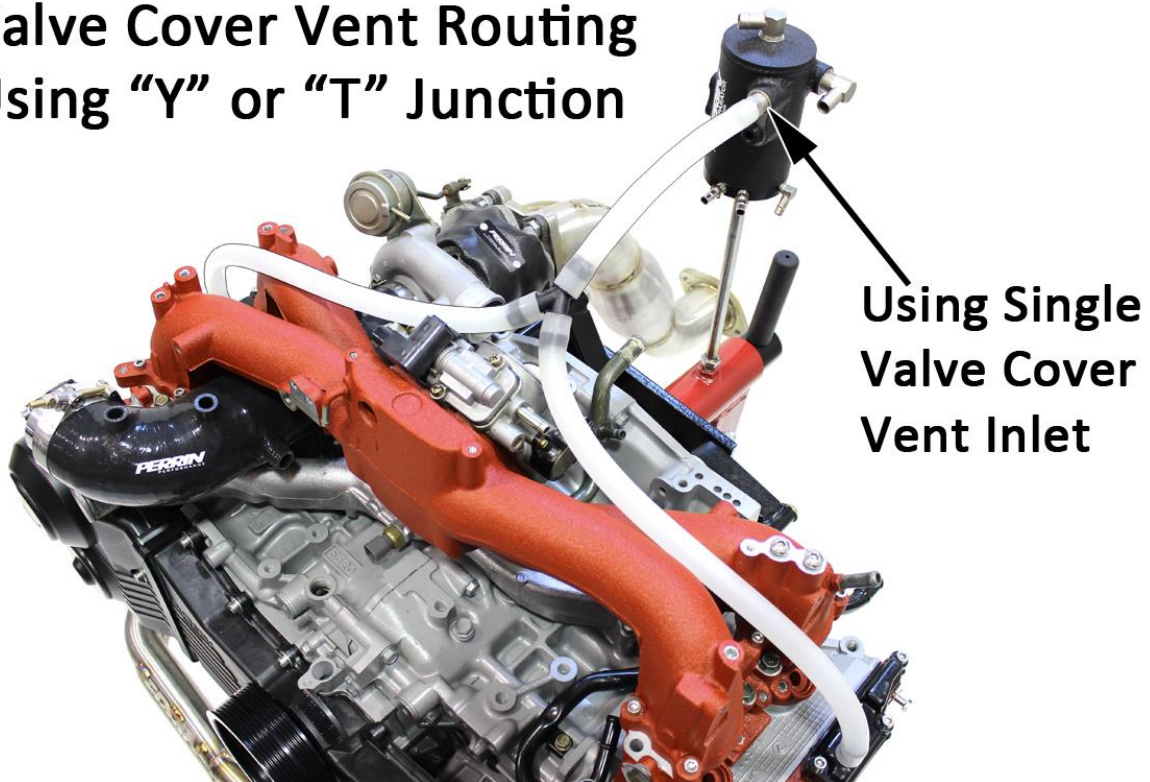


Actual routing of hoses may not be represented above. Diagram shows 2002-07 WRX/04+ STI with simplified path to help visualize routing whether using OEM hoses or supplied.

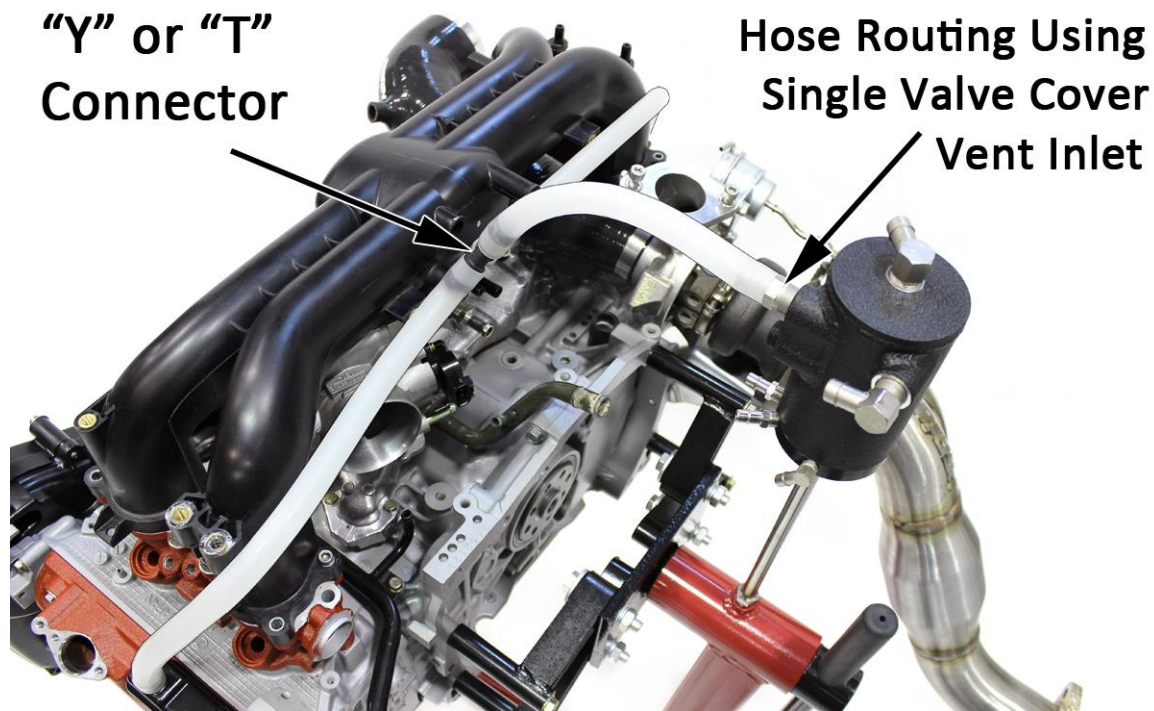


Actual routing of hoses may not be represented above. Diagram shows 08-14 WRX with simplified path to help visualize routing whether using OEM hoses or supplied.

6. Outlet and PCV Connection

- a. The AOS outlet is the top threaded hole on body. This connection needs to be connected to the turbo intake system in front of the turbocharger, and behind the air filter. **NOTE: We do not recommend leaving this fitting open as some oil can still come out under certain conditions, which can create a mess or combust if exposed to extreme heat.**
- b. Along this hose (connecting AOS top to intake system) you will need to install the PCV "Y" connection. The PCV is a 1-way valve that provides positive crank case ventilation during idle and light load situations. This valve is important to install correctly or boost pressure will be lost and there will be no positive crankcase ventilation occurring. **NOTE: The PCV connection can be skipped for certain applications, see special note regarding this at bottom of instructions.**
- c. Locate PCV junction removed from engine block in earlier step and remove PCV valve from junction.
 - i. 02-03 WRX's can skip this step as the OEM PCV is threaded into intake manifold and a hose will be attached directly to this in later step.
 - ii. Plastic housing type junctions (as shown below) need to remove valve threaded into body. Then thread PCV valve into included brass adapter. **See NPT Notes above regarding installation of this fitting. NOTE: This can be tight to remove and may require a vise to hold housing while fitting is unscrewed. It may be necessary to use solvent or a thread penetrating oil to free from housing.**

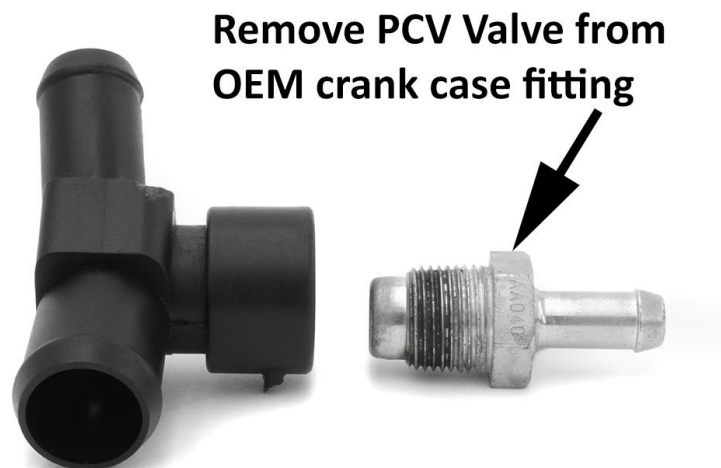

Thread OEM PCV into female barb fitting

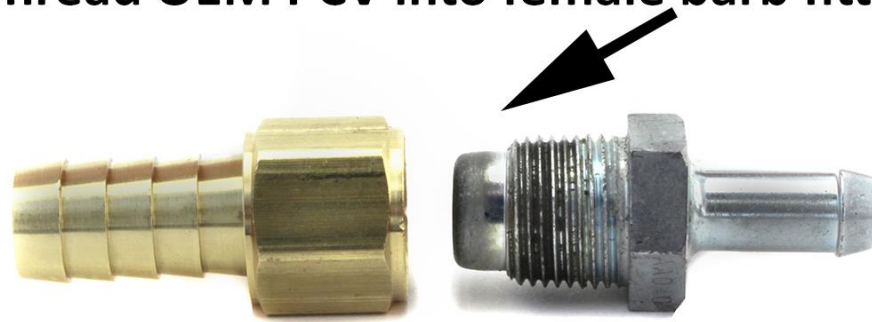

- iii. Rubber housing type junctions (as shown below) need to simply remove PCV valve and install into hoses as shown in later step.



**Remove PCV Valve
From OEM Crank Case
Junction**

- d. Install supplied 3/8NPT 1/2" barb, 90 degree black plastic connector into top of AOS. **See NPT notes above regarding installation of this fitting.**
- e. Locate previous PCV vacuum connection on intake manifold under throttle body. The diagrams below shows where you will find either a 3/8" fitting or PCV valve threaded into manifold. Picture below shows fitting (or PCV on 02-03 WRX) removed.
- i. For 2002-03 WRX's, connect supplied 1/2" emissions hose over PCV valve. This is a tight fit and will require a bit of stretching of hose as well as some force to push it over larger fitting. Use supplied #3 clamp to secure. Do not cut hose to length at this time.
 - ii. For other models, connect supplied 3/8" fuel hose to fitting and secure with #3 clamp. Do not cut hose to length at this time.




Above picture shows 2002-07 WRX/04+ STI manifold port for PCV connection. Shown with fitting (or PCV on 02-03 WRX) removed.




Above picture shows 2008-14 WRX manifold port for PCV connection.


- f. Using supplied 1/2" emissions hose, connect AOS outlet (top fitting) to intake vacuum source at turbo inlet hose. This varies from model to model and also if aftermarket parts are installed. Keep in mind that this connection needs to connect to intake between Mass Air Flow sensor and turbocharger inlet. See (3) different variants below.
- i. For 2002-07 WRX/04-11 STI models, use part of OEM crank case hose and cut after bends. Use supplied 1/2"-1/2" black plastic connector to join OEM rubber hose to 1/2" emissions hose.

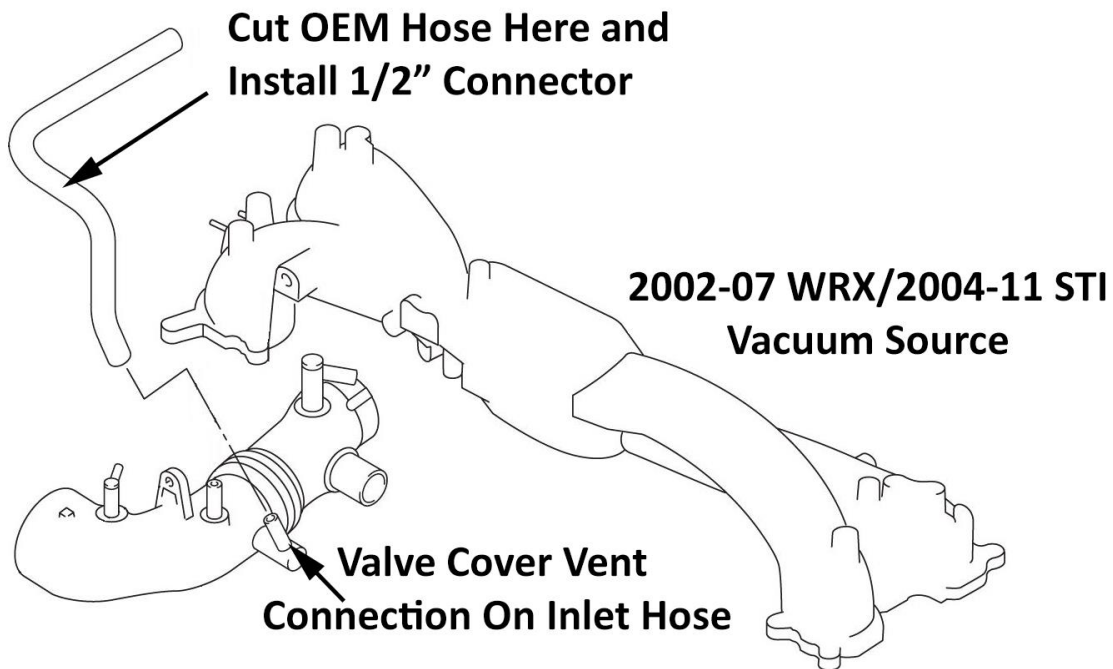


- ii. For 2012+ STI models, remove OEM rubber vacuum hose at white PCV diagnosis connector and connect 1/2" emissions hose to fitting. See example diagram below.

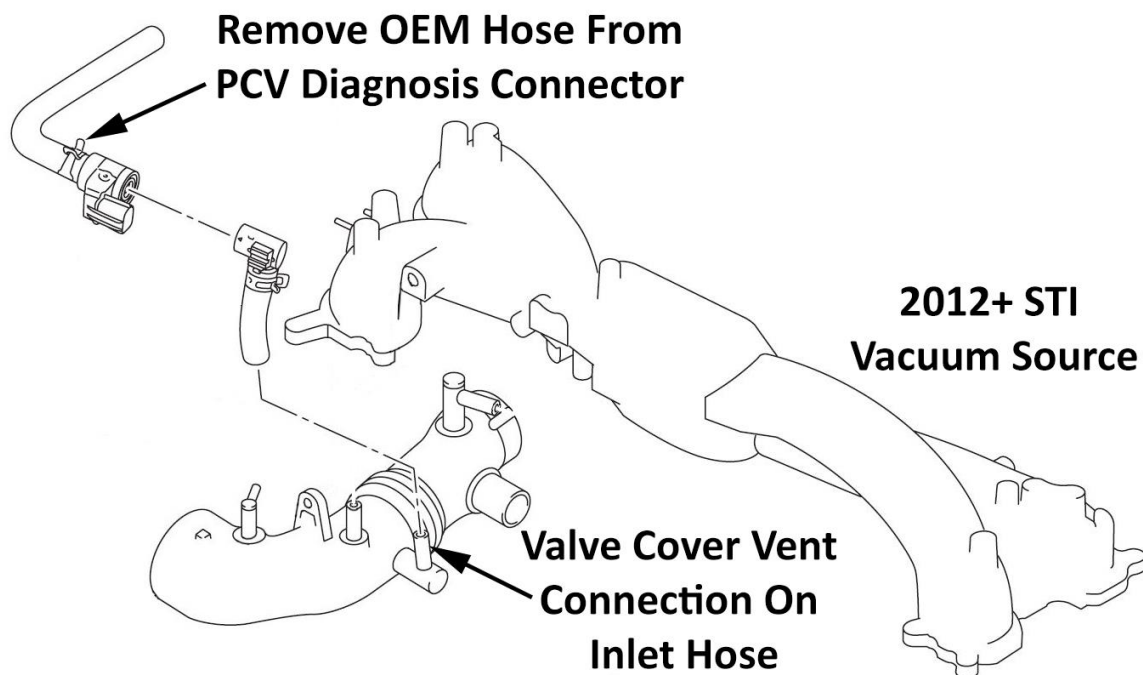

- iii. For 2008-14 WRX models, locate fitting on turbo inlet hose (as shown below) located under intake manifold. Make sure that short rubber hose is left on turbo inlet hose. Install supplied 1/2"-1/2" fitting into short rubber hose and secure with supplied clamps.

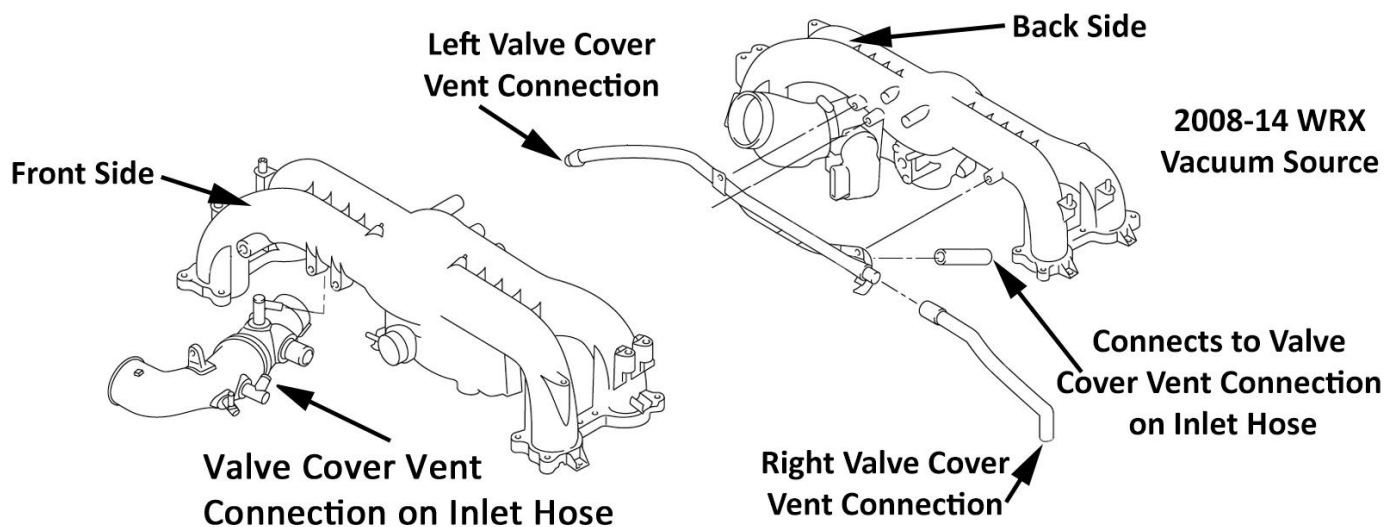

- iv. Vehicles with aftermarket turbo inlet hose will use one of the above installation methods depending on what is supplied with the inlet hose. If installing with PERRIN inlet hose, no additional fittings are needed.
- g. Decide where to install PCV valve (one way valve) and "Y" connector along 1/2" emissions hose coming from AOS outlet. **NOTE: The location of this is not important as long as it's along the hose between the AOS top and the turbo intake system. Below are a couple diagrams with different options as to where to make this junction.**

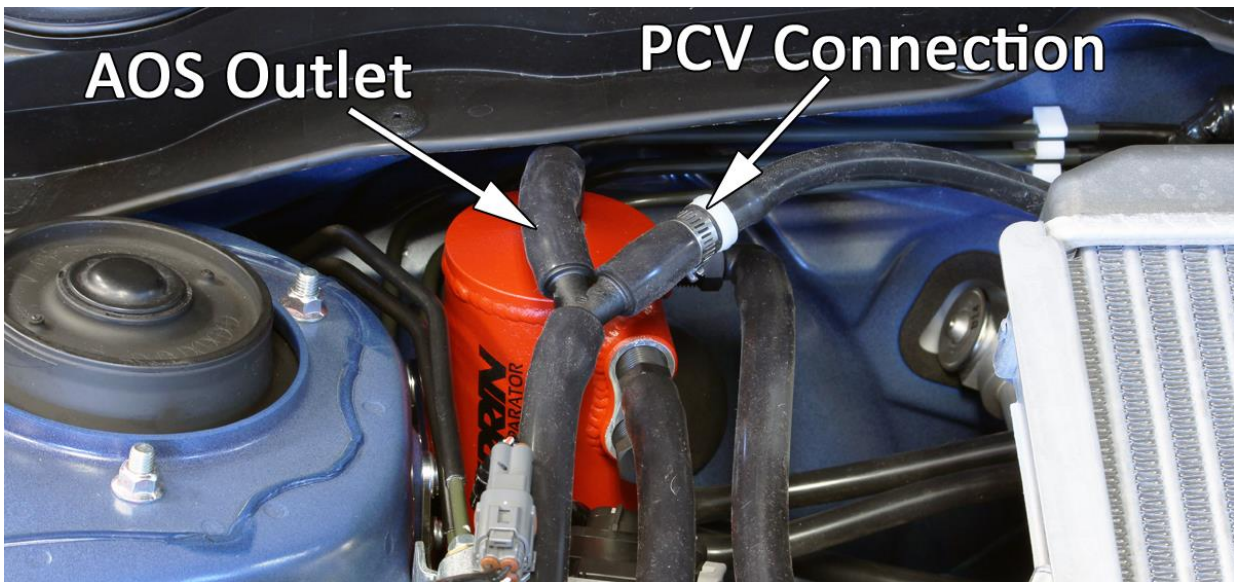


Picture shows Y junction installed at AOS, and PCV location. PCV location does not need to be this close to AOS.

- h. Once desired location is found, cut 1/2" emissions hose and install supplied "Y" connector making sure to aim 3rd leg back toward AOS away from Turbo Intake Vacuum source. Use above and below diagrams to give you a better idea how this can be setup. It is not critical as to the location of PCV valve itself. It can be located close to intake manifold or right at AOS outlet and it will not affect how system works.




Above diagram shows 04-07 WRX and 04-13 STI setup. 02-03 WRX will NOT have PCV valve located as shown.

- i. For 2002-03 WRX's, connect 1/2" emissions hose coming off PCV valve (threaded into manifold below throttle body) to 3rd leg of "Y" connector. Skip to Step 9 to continue installation.
- j. For all other models, cut a piece of 1/2" emissions hose (2" is what is shown in pictures) and install over 3rd leg of "Y" connector as shown in above and below diagrams.

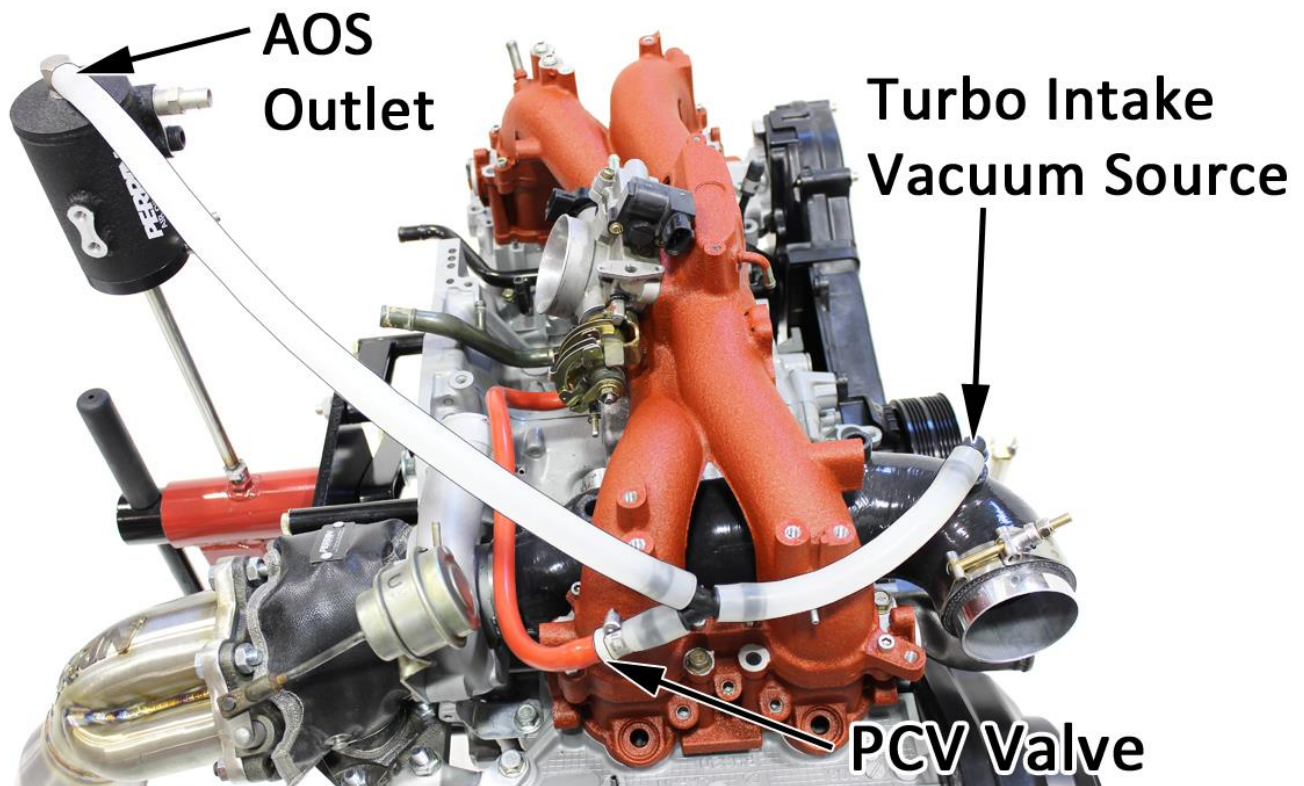


Above diagram shows 04-07 WRX and 04-13 STI setup. 02-03 WRX will NOT have PCV valve located as shown.

- k. Install 1/2" side of PCV valve assembly (assembled or removed from junction in previous steps) into short 1/2" emissions hose coming off "Y". Install supplied clamp and tighten down on hose. **Note: This step is important as installing this valve backwards will damage engine.**
- l. Route previously installed 3/8" fuel hose from intake manifold PCV fitting to 3/8" fitting on PCV valve. Cut hose to length and secure hose with supplied clamps. Using above and below diagrams, ensure that PCV valve (one-way valve) is installed in the correct direction and on the correct leg of "Y" connector.

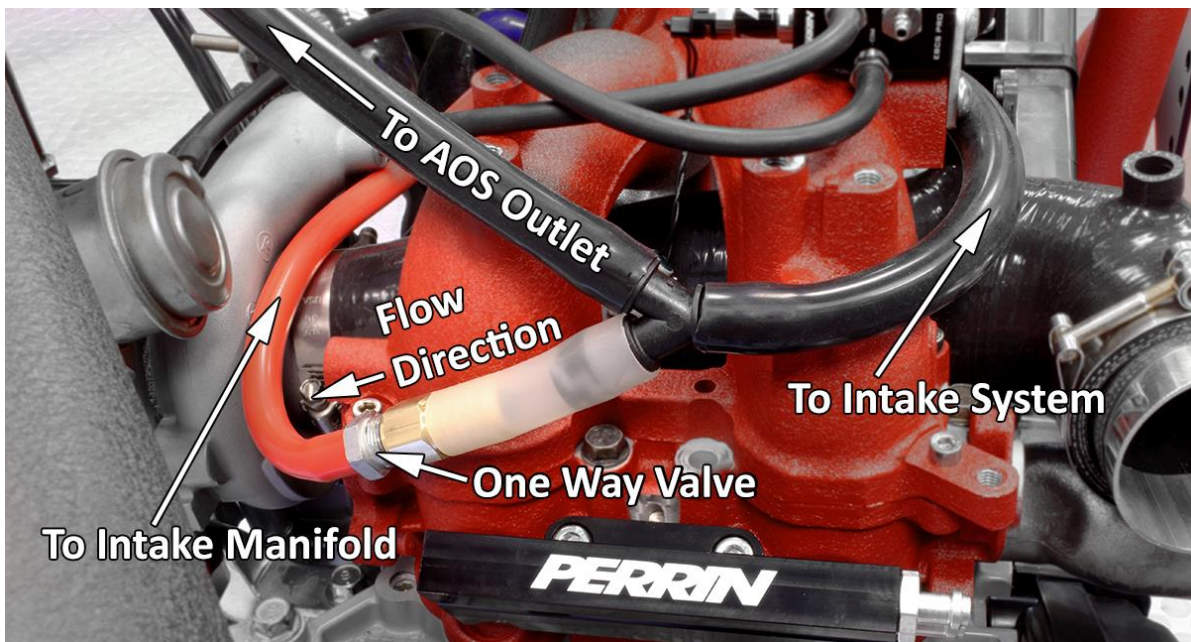


Above diagram shows close-up of PCV valve and an alternative location.

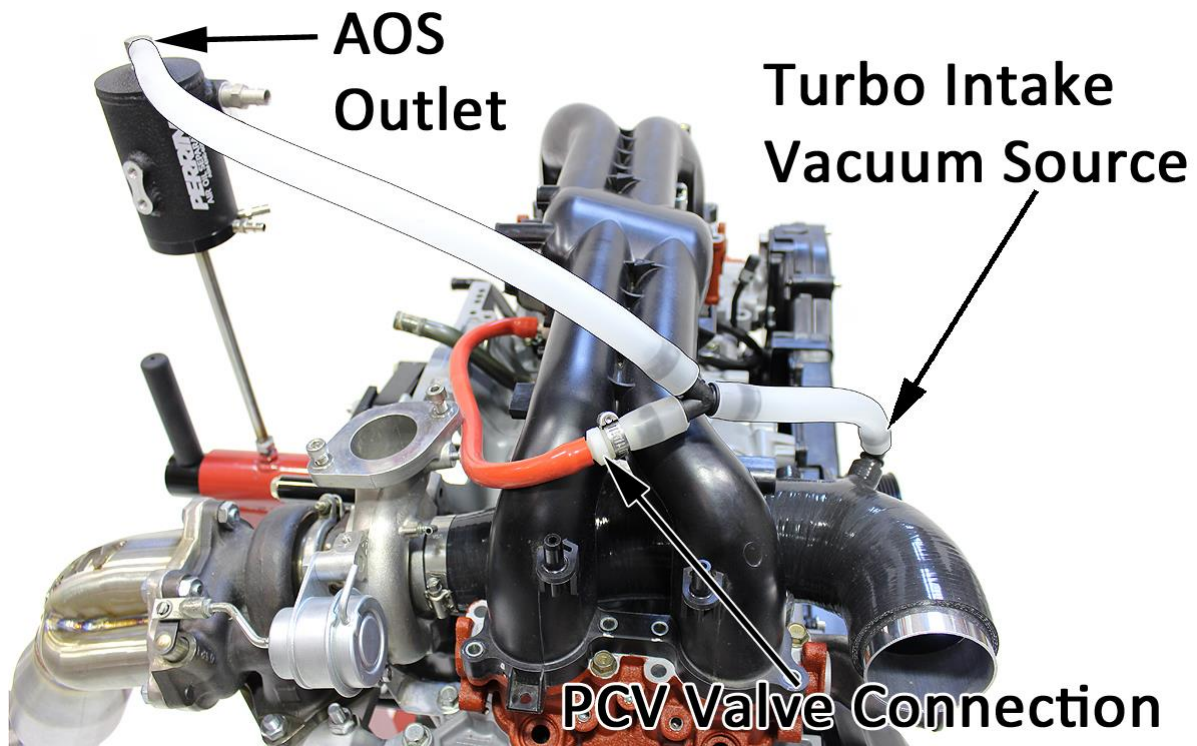

Above picture shows typical 08-14 WRX setup.

**Connect To Hose Going
To Intake Manifold**



**Connect To Hose Going
Toward "Y" Connector**



Above diagram shows PCV valve removed from 2011+ WRX PCV junction.

7. After AOS is completely installed, double check that all hoses and vacuum lines are connected and secured using a clamp. Any leak in the system can cause the engine to run poorly and will lead to unsafe engine conditions.
8. Check that all bolts and hardware securing AOS are tightened down.
9. Reconnect throttle body to intake manifold. **NOTE: Gasket can be reused if it was not damaged during installation.**
10. Using supplied zip ties, secure hoses to engine and other hoses. This will reduce the chance of abrasion wearing down hoses over time.
11. Reinstall intercooler pipes removed earlier and start car. Ensure its running as it was before. Turn off engine and add any coolant that was lost during installation. Restart engine and take car for test drive. If car is misfiring or check engine light occurs, recheck all aspects of install.
12. After roughly 10 minutes of driving, recheck all fittings for signs of leaking. If leaks are found stop and fix ASAP.